PN AJF 90


Swage nipple, ORFS angle 90°

HANSA-FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	UN/UNF nut threads
Sealing form 1	flat sealing
Short code	ORFS
Standard	ISO 8434-3
Material	Steel
Surface	electro galvanised



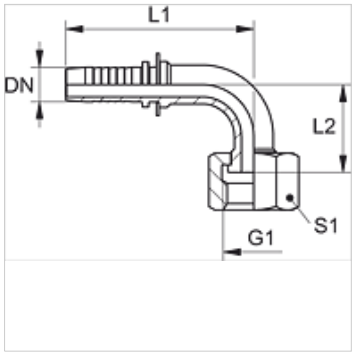

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 06 AJF 90	6	4	1/4"	413,0	9/16"-18 UNF	55,0	26,5	17
PN 06 AJF 90 L21	6	4	1/4"	413,0	9/16"-18 UNF	55,0	21,0	17
PN 06 AJF 90 L58	6	4	1/4"	413,0	9/16"-18 UNF	55,0	58,0	17
PN 06 AJF 10 90	6	4	1/4"	413,0	11/16" -16 UN	55,0	28,0	22
PN 08 AJF 10 90	8	5	5/16"	413,0	11/16" -16 UN	58,0	28,0	22
PN 08 AJF 10 90 L23	8	5	5/16"	413,0	11/16" -16 UN	58,0	23,0	22
PN 10 AJF 90	10	6	3/8"	413,0	11/16" -16 UN	64,0	32,0	22
PN 10 AJF 90 L23	10	6	3/8"	413,0	11/16" -16 UN	64,0	23,0	22
PN 10 AJF 90 L 69	10	6	3/8"	413,0	11/16" -16 UN	64,0	69,0	22
PN 10 AJF 13 90	10	6	3/8"	413,0	13/16" -16 UN	64,0	33,0	24
PN 13 AJF 10 90 L30	12	8	1/2"	413,0	11/16" -16 UN	72,5	30,0	22
PN 13 AJF 90	12	8	1/2"	413,0	13/16" -16 UN	72,5	37,0	24
PN 13 AJF 90 L29	12	8	1/2"	413,0	13/16" -16 UN	72,5	29,0	24
PN 13 AJF 90 L82	12	8	1/2"	413,0	13/16" -16 UN	72,5	82,0	24
PN 13 AJF 16 90	12	8	1/2"	413,0	1" -14 UNS	72,5	41,0	30
PN 13 AJF 20 90	12	8	1/2"	413,0	1.3/16" -12 UN	71,5	43,5	36
PN 13 AJF 20 90 L38	12	8	1/2"	413,0	1.3/16" -12 UN	72,5	38,0	36
PN 16 AJF 90	16	10	5/8"	413,0	1" -14 UNS	88,0	47,5	30
PN 16 AJF 90 L32	16	10	5/8"	413,0	1" -14 UNS	88,0	32,0	30
PN 16 AJF 90 L94	16	10	5/8"	413,0	1" -14 UNS	88,0	94,0	30
PN 16 AJF 20 90	16	10	5/8"	413,0	1.3/16" -12 UN	89,5	49,0	36
PN 20 AJF 90	19	12	3/4"	413,0	1.3/16" -12 UN	99,5	52,0	36
PN 20 AJF 90 L48	19	12	3/4"	413,0	1.3/16" -12 UN	99,5	48,0	36
PN 20 AJF 90 L96	19	12	3/4"	413,0	1.3/16" -12 UN	99,5	96,0	36
PN 20 AJF 25 90	19	12	3/4"	413,0	1.7/16" -12 UN	98,5	56,0	41
PN 25 AJF 20 90 L51	25	16	1"	413,0	1.3/16" -12 UN	127,0	51,0	36
PN 25 AJF 90	25	16	1"	413,0	1.7/16" -12 UN	127,0	63,5	41
PN 25 AJF 90 L56	25	16	1"	413,0	1.7/16" -12 UN	127,0	56,0	41
PN 25 AJF 90 L114	25	16	1"	413,0	1.7/16" -12 UN	127,0	114,0	41
PN 32 AJF 90	31	20	1.1/4"	275,0	1.11/16" -12 UN	151,5	76,0	50
PN 32 AJF 90 L129	31	20	1.1/4"	275,0	1.11/16" -12 UN	151,5	129,0	50
PN 40 AJF 90	38	24	1.1/2"	275,0	2" -12 UN	176,5	89,0	60
PN 40 AJF 90 L146	38	24	1.1/2"	275,0	2" -12 UN	176,5	146,0	60

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.