


PN AJF 90

Swage nipple, ORFS angle 90°

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	UN/UNF nut threads
Sealing form 1	flat sealing
Short code	ORFS
Standard	ISO 8434-3
Material	Steel
Surface	electro galvanised

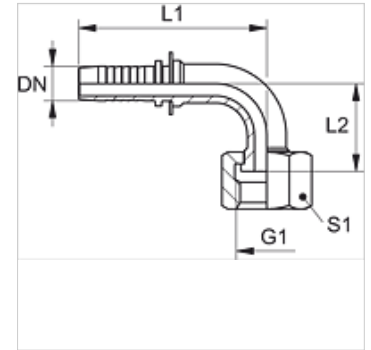

Note

Choose the appropriate ferrule based on the hose type.

Item	Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 06 AJF 90	PN 06 AJF 90	6	4	1/4"	413,0	9/16"-18 UNF	55,0	26,5	17
PN 06 AJF 90 L21	PN 06 AJF 90 L21	6	4	1/4"	413,0	9/16"-18 UNF	55,0	21,0	17
PN 06 AJF 90 L58	PN 06 AJF 90 L58	6	4	1/4"	413,0	9/16"-18 UNF	55,0	58,0	17
PN 06 AJF 10 90	PN 06 AJF 10 90	6	4	1/4"	413,0	11/16"-16 UN	55,0	28,0	22
PN 08 AJF 10 90	PN 08 AJF 10 90	8	5	5/16"	413,0	11/16"-16 UN	58,0	28,0	22
PN 08 AJF 10 90 L23	PN 08 AJF 10 90 L23	8	5	5/16"	413,0	11/16"-16 UN	58,0	23,0	22
PN 10 AJF 90	PN 10 AJF 90	10	6	3/8"	413,0	11/16"-16 UN	64,0	32,0	22
PN 10 AJF 90 L23	PN 10 AJF 90 L23	10	6	3/8"	413,0	11/16"-16 UN	64,0	23,0	22
PN 10 AJF 90 L 69	PN 10 AJF 90 L 69	10	6	3/8"	413,0	11/16"-16 UN	64,0	69,0	22
PN 10 AJF 13 90	PN 10 AJF 13 90	10	6	3/8"	413,0	13/16"-16 UN	64,0	33,0	24
PN 13 AJF 10 90 L30	PN 13 AJF 10 90 L30	12	8	1/2"	413,0	11/16"-16 UN	72,5	30,0	22
PN 13 AJF 90	PN 13 AJF 90	12	8	1/2"	413,0	13/16"-16 UN	72,5	37,0	24
PN 13 AJF 90 L29	PN 13 AJF 90 L29	12	8	1/2"	413,0	13/16"-16 UN	72,5	29,0	24
PN 13 AJF 90 L82	PN 13 AJF 90 L82	12	8	1/2"	413,0	13/16"-16 UN	72,5	82,0	24
PN 13 AJF 16 90	PN 13 AJF 16 90	12	8	1/2"	413,0	1"-14 UNS	72,5	41,0	30
PN 13 AJF 20 90	PN 13 AJF 20 90	12	8	1/2"	413,0	1.3/16"-12 UN	71,5	43,5	36
PN 13 AJF 20 90 L38	PN 13 AJF 20 90 L38	12	8	1/2"	413,0	1.3/16"-12 UN	72,5	38,0	36
PN 16 AJF 90	PN 16 AJF 90	16	10	5/8"	413,0	1"-14 UNS	88,0	47,5	30
PN 16 AJF 90 L32	PN 16 AJF 90 L32	16	10	5/8"	413,0	1"-14 UNS	88,0	32,0	30
PN 16 AJF 90 L94	PN 16 AJF 90 L94	16	10	5/8"	413,0	1"-14 UNS	88,0	94,0	30
PN 16 AJF 20 90	PN 16 AJF 20 90	16	10	5/8"	413,0	1.3/16"-12 UN	89,5	49,0	36
PN 20 AJF 90	PN 20 AJF 90	19	12	3/4"	413,0	1.3/16"-12 UN	99,5	52,0	36
PN 20 AJF 90 L48	PN 20 AJF 90 L48	19	12	3/4"	413,0	1.3/16"-12 UN	99,5	48,0	36
PN 20 AJF 90 L96	PN 20 AJF 90 L96	19	12	3/4"	413,0	1.3/16"-12 UN	99,5	96,0	36
PN 20 AJF 25 90	PN 20 AJF 25 90	19	12	3/4"	413,0	1.7/16"-12 UN	98,5	56,0	41
PN 25 AJF 20 90 L51	PN 25 AJF 20 90 L51	25	16	1"	413,0	1.3/16"-12 UN	127,0	51,0	36
PN 25 AJF 90	PN 25 AJF 90	25	16	1"	413,0	1.7/16"-12 UN	127,0	63,5	41
PN 25 AJF 90 L56	PN 25 AJF 90 L56	25	16	1"	413,0	1.7/16"-12 UN	127,0	56,0	41
PN 25 AJF 90 L114	PN 25 AJF 90 L114	25	16	1"	413,0	1.7/16"-12 UN	127,0	114,0	41
PN 32 AJF 90	PN 32 AJF 90	31	20	1.1/4"	275,0	1.11/16"-12 UN	151,5	76,0	50
PN 32 AJF 90 L129	PN 32 AJF 90 L129	31	20	1.1/4"	275,0	1.11/16"-12 UN	151,5	129,0	50
PN 40 AJF 90	PN 40 AJF 90	38	24	1.1/2"	275,0	2"-12 UN	176,5	89,0	60
PN 40 AJF 90 L146	PN 40 AJF 90 L146	38	24	1.1/2"	275,0	2"-12 UN	176,5	146,0	60