
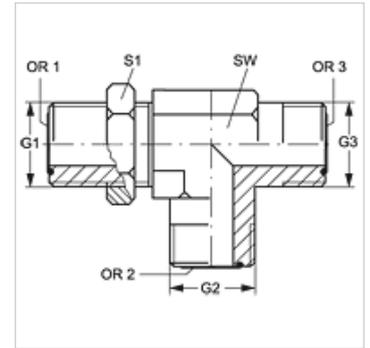


SL HJOF

Bulkhead fitting socket, T shaped

Properties

| | |
|---------------------------|--|
| Connection 1 - 3 | ORFS external threads |
| Sealing form 1 - 3 | flat seal with O-ring |
| Design | Adjustable direction bulkhead fitting socket |
| Construction | L shaped |
| Material | Steel |
| Surface | electro galvanised |



Item

| Identification | G1 - G3 | OR1 - OR3 | AF (mm) | S1 |
|-------------------|-----------------|--------------|------------|----|
| SL HJOF 04 | 9/16"-18 UNF | 7.66 x 1.78 | 14 | 22 |
| SL HJOF 06 | 11/16" -16 UN | 9.25 x 1.78 | 19 | 27 |
| SL HJOF 08 | 13/16" -16 UN | 12.42 x 1.78 | 19 | 30 |
| SL HJOF 10 | 1" -14 UNS | 15.60 x 1.78 | 27 | 32 |
| SL HJOF 12 | 1.3/16" -12 UN | 18.77 x 1.78 | 30 | 38 |
| SL HJOF 16 | 1.7/16" -12 UN | 23.52 x 1.78 | 37 | 46 |
| SL HJOF 20 | 1.11/16" -12 UN | 29.87 x 1.78 | 41 | 51 |
| SL HJOF 24 | 2" -12 UN | 37.82 x 1.78 | 48 | 60 |

SW, S1, S2 = With across flats