


# T O HJOF

Screw-in socket, T shaped

## Properties

<b>Connection 1</b>	UN/UNF external threads
<b>Sealing form 1</b>	O-ring seal on screw-in socket
<b>Connection 2 + 3</b>	ORFS external threads
<b>Sealing form 2 + 3</b>	flat seal with O-ring
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	T shaped
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

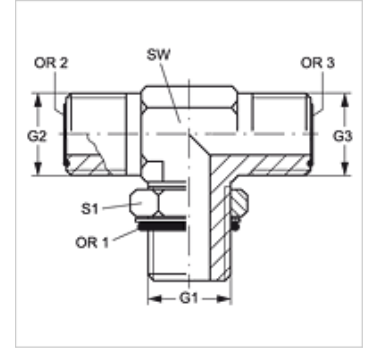

## Item

Identification	G1	G2 + G3	AF (mm)	S1	OR1	OR2 + OR3
<b>T O 04 HJOF</b>	7/16"-20 UNF	9/16"-18 UNF	14	16	8.92 x 1.83	7.65 x 1.78
<b>T O 06 HJOF</b>	9/16"-18 UNF	1 1/16" -16 UN	19	19	11.89 x 1.98	9.25 x 1.78
<b>T O 08 HJOF</b>	3/4"-16 UNF	1 3/16" -16 UN	19	24	16.36 x 2.21	12.42 x 1.78
<b>T O 10 HJOF</b>	7/8" -14 UNF	1" -14 UNS	27	27	19.18 x 2.46	15.60 x 1.78
<b>T O 12 HJOF</b>	1.1/16" -12 UN	1.3/16" -12 UN	30	36	23.47 x 2.95	18.77 x 1.78
<b>T O 16 HJOF</b>	1.5/16" -12 UN	1.7/16" -12 UN	37	41	29.74 x 2.95	23.52 x 1.78
<b>T O 20 HJOF</b>	1.5/8" -12 UN	1.11/16" -12 UN	41	48	37.47 x 3.00	29.87 x 1.78
<b>T O 24 HJOF</b>	1.7/8" -12 UN	2" -12 UN	48	54	43.69 x 3.00	37.82 x 1.78

SW, S1, S2 = With across flats