


T O HJOF

Screw-in socket, T shaped

Properties

Connection 1	UN/UNF external threads
Sealing form 1	O-ring seal on screw-in socket
Connection 2 + 3	ORFS external threads
Sealing form 2 + 3	flat seal with O-ring
Design	Adjustable direction screw-in socket
Construction	T shaped
Material	Steel
Surface	electro galvanised

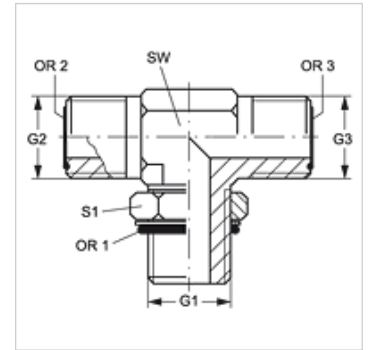

Item

Identification	G1	G2 + G3	AF (mm)	S1	OR1	OR2 + OR3
T O 04 HJOF	7/16"-20 UNF	9/16"-18 UNF	14	16	8.92 x 1.83	7.65 x 1.78
T O 06 HJOF	9/16"-18 UNF	1 1/16" -16 UN	19	19	11.89 x 1.98	9.25 x 1.78
T O 08 HJOF	3/4"-16 UNF	1 3/16" -16 UN	19	24	16.36 x 2.21	12.42 x 1.78
T O 10 HJOF	7/8" -14 UNF	1" -14 UNS	27	27	19.18 x 2.46	15.60 x 1.78
T O 12 HJOF	1 1/16" -12 UN	1 3/16" -12 UN	30	36	23.47 x 2.95	18.77 x 1.78
T O 16 HJOF	1 5/16" -12 UN	1 7/16" -12 UN	37	41	29.74 x 2.95	23.52 x 1.78
T O 20 HJOF	1 5/8" -12 UN	1 11/16" -12 UN	41	48	37.47 x 3.00	29.87 x 1.78
T O 24 HJOF	1 7/8" -12 UN	2" -12 UN	48	54	43.69 x 3.00	37.82 x 1.78

SW, S1, S2 = With across flats