


HK ZNS 01

Overcentre valve

Properties

| | |
|---------------------------|---------------------|
| Design | Sandwich body valve |
| Operating pressure | max. 350 bar |
| Volumetric flow | max. 60 l/min |
| Connection | ISO/Cetop 03 size 6 |

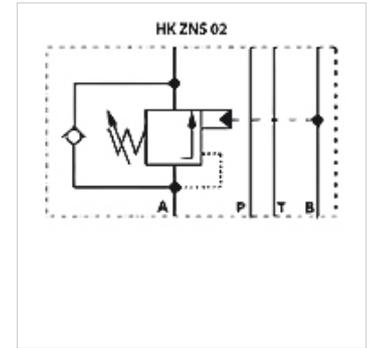

Note

These valves must be set according to the application.

Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 03 size 6 valves

Ordering information

Further sandwich body valves available on request

| Item | | | | | | |
|---------------------|-----------------|--------------------------------------|--------------------------------------|-----------------------|----------------------|----------------|
| Identification | acts in channel | Pressure setting range min. (bar) | Pressure setting range max. (bar) | Design | Plate height (mm) | Weight (kg) |
| HK ZNS A01 2 S0 D1 | A | 70 | 175 | Opening ratio 1 : 4.5 | 40 | 1,4 |
| HK ZNS A01 5 S0 D1 | A | 140 | 350 | Opening ratio 1 : 4.5 | 40 | 1,4 |
| HK ZNS B01 2 S0 D1 | B | 70 | 175 | Opening ratio 1 : 4.5 | 40 | 1,4 |
| HK ZNS B01 5 S0 D1 | B | 140 | 350 | Opening ratio 1 : 4.5 | 40 | 1,4 |
| HK ZNS AB01 2 S0 D1 | A + B | 70 | 175 | Opening ratio 1 : 4.5 | 40 | 1,4 |
| HK ZNS AB01 5 S0 D1 | A + B | 140 | 350 | Opening ratio 1 : 4.5 | 40 | 1,4 |