
HK ZNS 02
Overcentre valve

HANSA-FLEX

Properties

Design	Sandwich body valve
Operating pressure	max. 315 bar
Volumetric flow	max. 120 l/min
Connection	ISO/Cetop 05 size 10



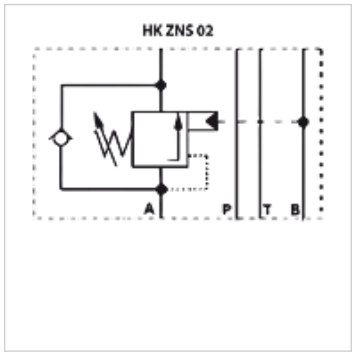

Note

These valves must be set according to the application.

Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 05 size 10 valves

Ordering information

Further sandwich body valves available on request

Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Design	Plate height (mm)	Weight (kg)
HK ZNS A02 2 S0 D1	A	70	175	Opening ratio 1 : 4.5	50	2,8
HK ZNS A02 5 S0 D1	A	140	315	Opening ratio 1 : 4.5	50	2,8
HK ZNS B02 2 S0 D1	B	70	175	Opening ratio 1 : 4.5	50	2,8
HK ZNS B02 5 S0 D1	B	140	315	Opening ratio 1 : 4.5	50	2,8
HK ZNS AB02 2 S0 D1	A + B	70	175	Opening ratio 1 : 4.5	50	2,8
HK ZNS AB02 5 S0 D1	A + B	140	315	Opening ratio 1 : 4.5	50	2,8

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.