
WA FL

Connector ... FL, steel

Properties

Application	Connection fitting for metal hoses
Connection 1	Pipe sockets
Sealing form 1	Cutting ring connection
Standard	ISO 8434-1 DIN 3861
Short code	BEL
Construction	straight
Series	light
Material	Steel (weldable)



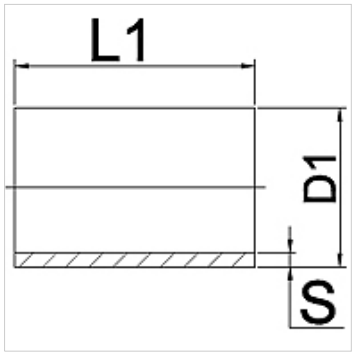

Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).
As an alternative we recommend connector shape AFL or AOL.

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	Series	D1 (mm)	s (mm)	L1 (mm)
WA 004 FL	4	250	6 L	6	1,0	25
WA 006 FL	6	250	8 L	8	1,0	30
WA 008 FL	8	250	10 L	10	1,0	30
WA 010 FL	10	219	12 L	12	1,0	30
WA 013 FL	13	250	15 L	15	1,5	32
WA 016 FL	16	160	18 L	18	1,5	32
WA 020 FL	20	160	22 L	22	1,5	36
WA 025 FL	25	100	28 L	28	2,0	40
WA 032 FL	32	100	35 L	35	2,0	45
WA 040 FL	40	100	42 L	42	2,0	45

Product versions

WA FL CU	Connector ... FL, copper, Copper
WA FL VA	Connector ... FL, VA, Stainless steel 1.4571

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.