
PVC TRANSP ST

Soft PVC hose

HANSA-FLEX

Properties

Application	Food industry
Special features	extremely durable, flexible, resistant to pressure and abrasion, UV and weatherproof
Inner layer	PVC suitable for use with foodstuffs
Insert	embedded steel wire helix
Outer layer	PVC suitable for use with foodstuffs
Colour	Transparent
Temp. min.	-5 °C
Temp. max.	60 °C
Media	Fruit juices Mineral water Wines liquid foodstuffs containing up to 15% alcohol

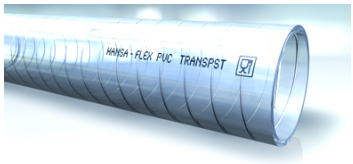

Item

Identification	Inches	Internal Ø (mm)	External Ø (mm)	Burst pressure (bar)	Vacuum (bar)	Min. bending radius (mm)	Roll length (m)
PVC 10 TRANSP ST	3/8"	10,0	16,0	21	0,90	20	50
PVC 12 TRANSP ST	1/2"	12,0	17,8	21	0,90	25	50
PVC 16 TRANSP ST	5/8"	16,0	21,7	18	0,90	35	50
PVC 19 TRANSP ST	3/4"	20,0	27,1	15	0,90	50	50
PVC 25 TRANSP ST	1"	25,4	33,3	15	0,90	60	50
PVC 32 TRANSP ST	1.1/4"	31,8	40,1	13	0,90	75	50
PVC 38 TRANSP ST	1.1/2"	38,1	46,7	12	0,90	90	50
PVC 51 TRANSP ST	2"	50,8	61,1	9	0,80	125	50
PVC 63 TRANSP ST	2.1/2"	63,0	75,0	7	0,70	150	30
PVC 76 TRANSP ST	3"	76,0	89,9	6	0,70	195	30
PVC 102 TRANSP ST	4"	101,6	116,3	6	0,60	300	30

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.