
WA FS

Connector ... FS, steel

Properties

Application	Connection fitting for metal hoses
Connection 1	Pipe sockets
Sealing form 1	Cutting ring connection
Standard	ISO 8434-1 DIN 3861
Short code	BES
Construction	straight
Series	heavy
Material	Steel (weldable)



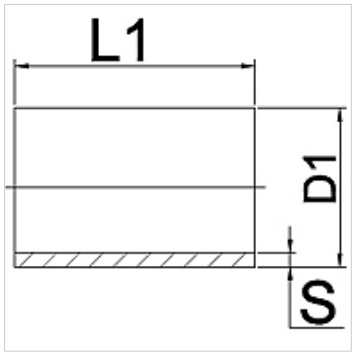

Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).
As an alternative we recommend connector shape AFS or AOS.

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	Series	D1 (mm)	s (mm)	L1 (mm)
WA 004 FS	4	320	8S	8	1,0	30
WA 006 FS	6	263	10 S	10	1,0	30
WA 008 FS	8	219	12 S	12	1,0	30
WA 010 FS	10	299	14 S	14	1,5	35
WA 013 FS	13	262	16 S	16	1,5	35
WA 016 FS	16	288	20 S	20	2,0	40
WA 020 FS	20	230	25 S	25	2,0	45
WA 025 FS	25	244	30 S	30	2,5	50
WA 032 FS	32	222	38 S	38	3,0	55

Product versions

WA FS VA	Connector ... FS, VA, Stainless steel 1.4571

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.