


### Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	metric nut thread
<b>Sealing form 1</b>	24° outer cone with O-ring
<b>Standard</b>	DIN 3865 ISO 8434-1
<b>Short code</b>	DKOL
<b>Construction</b>	straight
<b>Series</b>	light
<b>Material</b>	Steel (weldable)

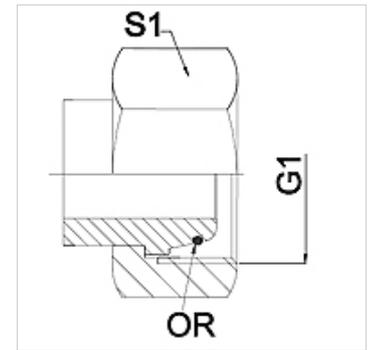

### Note

Width across flats values are listed for reference purposes!

### Ordering information

Other designs available on request

### Item

Identification	DN	PN (bar)	G1	Series	S1 (mm)
WA 004 AOL	4	250	M 12 x 1.5	6 L	14,0
WA 006 AOL	6	250	M 14 x 1.5	8 L	17,0
WA 008 AOL	8	250	M 16 x 1.5	10 L	19,0
WA 010 AOL	10	250	M 18 x 1.5	12 L	22,0
WA 013 AOL	13	250	M 22 x 1.5	15 L	27,0
WA 016 AOL	16	160	M 26 x 1.5	18 L	32,0
WA 020 AOL	20	160	M 30 x 2	22 L	36,0
WA 025 AOL	25	100	M 36 x 2	28 L	41,0
WA 032 AOL	32	100	M 45 x 2	35 L	50,0
WA 040 AOL	40	100	M 52 x 2	42 L	60,0

### Product versions

WA AOL VA Connector ... AOL, VA, Stainless steel