# PVC WAS ELAST

PVC water hose

## Properties

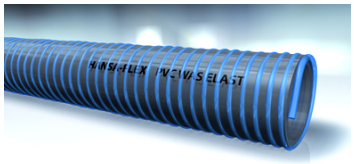

| | |
|---|---|
| **Application** | Agricultural technology |
| **Special features** | durable<br>resistant to pressure and abrasion<br>flexible<br>weatherproof |
| **Standard** | ISO 1307 |
| **Inner layer** | stable, high flexibility, smooth plasticised PVC |
| **Insert** | impact and pressure resistant PVC reinforcing spiral |
| **Outer layer** | slightly ribbed outer surface |
| **Temp. min.** | -20 °C |
| **Temp. max.** | 50 °C |
| **Media** | Water |

## Item

| Identification | Inches | Internal Ø (mm) | BD* at 20°C (bar) | Burst pressure (bar) | Vacuum (bar) | Min. bending radius (mm) | Roll length (m) |
|---|---|---|---|---|---|---|---|
| **PVC WAS 25 ELAST** | 1" | 25 | 7,0 | 20 | 0,9 | 90 | 50 |
| **PVC WAS 32 ELAST** | 1.1/4" | 32 | 6,0 | 17 | 0,9 | 130 | 50 |
| **PVC WAS 38 ELAST** | 1.1/2" | 38 | 6,0 | 16 | 0,9 | 140 | 50 |
| **PVC WAS 51 ELAST** | 2" | 51 | 5,0 | 15 | 0,9 | 200 | 50 |
| **PVC WAS 63 ELAST** | 2.1/2" | 63 | 4,5 | 14 | 0,9 | 275 | 50 |
| **PVC WAS 76 ELAST** | 3" | 76 | 4,0 | 12 | 0,9 | 310 | 50 |
| **PVC WAS 90 ELAST** | 3.1/2" | 90 | 3,5 | 10 | 0,9 | 375 | 50 |
| **PVC WAS 102 ELAST** | 4" | 102 | 3,0 | 10 | 0,9 | 410 | 20 / 30 |
| **PVC WAS 110 ELAST** | 4.3/8" | 110 | 3,0 | 10 | 0,9 | 450 | 20 / 30 |
| **PVC WAS 127 ELAST** | 5" | 127 | 2,5 | 9 | 0,9 | 520 | 20 / 30 |
| **PVC WAS 152 ELAST** | 6" | 152 | 2,0 | 9 | 0,9 | 610 | 15 |

BD = Working pressure

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*