


# SRS 1-5 D PP

Pipe clamp, double pipes



## Properties

|                          |                          |
|--------------------------|--------------------------|
| <b>Design</b>            | Double pipe clamp        |
| <b>Construction type</b> | Inside of clamp with web |
| <b>Standard</b>          | DIN 3015-3               |
| <b>Temp. min.</b>        | -30 °C                   |
| <b>Temp. max.</b>        | 90 °C                    |
| <b>Material</b>          | Polypropylene            |

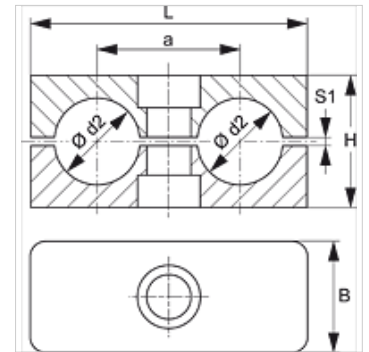

## Note

The use of clamps with a smooth inner surface is recommended for retaining hoses and cables. No pretension is applied when fitting and the block height H is reduced to the gap width S1.

## Description

Webs in the inner surface of the clamps dampen impacts and vibrations and absorb forces along the pipe axis. A gap between the two halves pretensions the pipe.

## Ordering information

1 piece = 2 halves of clamp

| Item           |            |                            |                    |           |           |           |           |            |
|----------------|------------|----------------------------|--------------------|-----------|-----------|-----------|-----------|------------|
| Identification | Clamp size | External pipe Ø d2<br>(mm) | External pipe Ø d2 | a<br>(mm) | B<br>(mm) | H<br>(mm) | L<br>(mm) | S1<br>(mm) |
| SRS 106 D PP   | 1          | 6,0                        | -                  | 20        | 30        | 27        | 36        | 1,0        |
| SRS 106.4 D PP | 1          | 6,4                        | 1/4"               | 20        | 30        | 27        | 36        | 1,0        |
| SRS 108 D PP   | 1          | 8,0                        | 5/16"              | 20        | 30        | 27        | 36        | 1,0        |
| SRS 109.5 D PP | 1          | 9,5                        | 3/8"               | 20        | 30        | 27        | 36        | 1,0        |
| SRS 110 D PP   | 1          | 10,0                       | -                  | 20        | 30        | 27        | 36        | 1,0        |
| SRS 112 D PP   | 1          | 12,0                       | -                  | 20        | 30        | 27        | 36        | 1,0        |
| SRS 212.7 D PP | 2          | 12,7                       | 1/2"               | 29        | 30        | 26        | 53        | 1,2        |
| SRS 213.5 D PP | 2          | 13,5                       | -                  | 29        | 30        | 26        | 53        | 1,2        |
| SRS 214 D PP   | 2          | 14,0                       | -                  | 29        | 30        | 26        | 53        | 1,2        |
| SRS 215 D PP   | 2          | 15,0                       | -                  | 29        | 30        | 26        | 53        | 1,2        |
| SRS 216 D PP   | 2          | 16,0                       | 5/8"               | 29        | 30        | 26        | 53        | 1,2        |
| SRS 217.2 D PP | 2          | 17,2                       | -                  | 29        | 30        | 26        | 53        | 1,2        |
| SRS 218 D PP   | 2          | 18,0                       | -                  | 29        | 30        | 26        | 53        | 1,2        |
| SRS 319 D PP   | 3          | 19,0                       | 3/4"               | 36        | 30        | 37        | 67        | 1,6        |
| SRS 320 D PP   | 3          | 20,0                       | -                  | 36        | 30        | 37        | 67        | 1,6        |
| SRS 321.3 D PP | 3          | 21,3                       | -                  | 36        | 30        | 37        | 67        | 1,6        |
| SRS 322 D PP   | 3          | 22,0                       | -                  | 36        | 30        | 37        | 67        | 1,6        |
| SRS 325 D PP   | 3          | 25,0                       | 1"                 | 36        | 30        | 37        | 67        | 1,6        |
| SRS 426.9 D PP | 4          | 26,9                       | -                  | 45        | 30        | 42        | 82        | 2,0        |
| SRS 428 D PP   | 4          | 28,0                       | -                  | 45        | 30        | 42        | 82        | 2,0        |
| SRS 430 D PP   | 4          | 30,0                       | -                  | 45        | 30        | 42        | 82        | 2,0        |
| SRS 532 D PP   | 5          | 32,0                       | 1.1/4"             | 56        | 30        | 54        | 106       | 2,0        |
| SRS 533.7 D PP | 5          | 33,7                       | -                  | 56        | 30        | 54        | 106       | 2,0        |
| SRS 535 D PP   | 5          | 35,0                       | -                  | 56        | 30        | 54        | 106       | 2,0        |
| SRS 538 D PP   | 5          | 38,0                       | 1.1/2"             | 56        | 30        | 54        | 106       | 2,0        |
| SRS 542 D PP   | 5          | 42,0                       | -                  | 56        | 30        | 54        | 106       | 2,0        |

## Product versions

|                |  |
|----------------|--|
| SRS 1-5 D PP G | Pipe clamp, double pipes, Inside of clamp, smooth  |
| SRS 1-5 D PA   | Pipe clamp, double pipes, Inside of clamp with web |
| SRS 1-5 D VG   | Pipe clamp, double pipes, Inside of clamp, smooth  |

## Additional element for following products

|     |                                      |
|-----|--------------------------------------|
| B A | Configuration of group B composition |
|-----|--------------------------------------|



