# HK GEH ZP NG

Steel housing sandwich plate NG6/10 for SAE 2-way cartridge valve

## Properties

| | |
|---|---|
| **Sealing form** | O-ring seal |
| **Design** | functions in channel A + B<br>optional sealing of a cartridge bore with blank plug (*) |
| **Material** | Steel |
| **Operating pressure** | max. 350 bar |



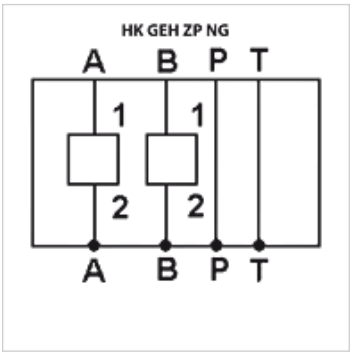


## Note

(*) matching blank plugs
for SAE08/2 : PLUG O 08
for SAE10/2 : PLUG O 10
for SAE12/2 : PLUG O 12

## Item

| Identification | Connection | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | for valve type | Weight (kg) |
|---|---|---|---|---|---|---|---|---|
| **HK ZP NG6 C08 AB** | Cetop 03 NG 6 | 45 | 50 | 25 | 100 | 45 | HK EMDV08 - SAE8/2 3/4-16UNF-2B | 1,3 |
| **HK ZP NG6 C10 AB** | Cetop 03 NG 6 | 45 | 50 | 25 | 100 | 45 | HK EMDV10 - SAE10/2 7/8-14UNF-2B | 1,2 |
| **HK ZP NG10 C12 AB** | Cetop 05 NG 10 | 75 | 50 | 31 | 160 | 52 | HK EMDV12 - SAE12/2 1.1/16-12UNF-2B | 2,1 |

## Accessories

| | |
|---|---|
| **VERSCHLUSS O** | Blanking socket |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*