
K-VTST 3 AB MS

Distributor pieces, brass, with 3 outlets

Properties

Connection	G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing
Operating pressure	Max. 10 bar



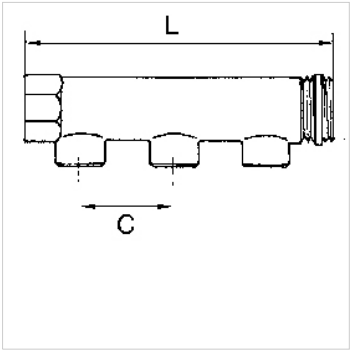

Note

Further information on request

Description

For assembling compressed air taps.End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Item

Identification	Output	Input	C (mm)	L (mm)
K- 07 40 40 55	3 x 1/2 male	2 x 3/4	50,0	160,0
K- 07 40 40 56	3 x 1/2 female	2 x 3/4	50,0	160,0
K- 07 40 40 57	3 x 1/2 male	2 x 1	50,0	163,0
K- 07 40 40 58	3 x 1/2 female	2 x 1	50,0	163,0
K- 07 40 40 59	3 x 1/2 male	2 x 1 1/4	60,0	197,0
K- 07 40 40 60	3 x 1/2 female	2 x 1 1/4	60,0	197,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.