


# K-WTEH 2-TLG PC SCHU MANO HANSA

Service units, 2-piece with polycarbonate bowl, bowl guard and pressure gauge

**HANSA FLEX**

## Properties

<b>Input pressure</b>	1.5 - 16 bar
<b>Output pressure</b>	0.5 - 8 bar
<b>Temp. range</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Filter rating</b>	5,00 µm
<b>Connection thread</b>	Material: Die-cast zinc
<b>Container</b>	Polycarbonate (with bayonet lock)
<b>Filter element</b>	Cellpor (PE)
<b>Housing</b>	Material: Grivory® (PA 66)
<b>Diaphragm</b>	NBR
<b>Protective cage</b>	Polyamide
<b>Dropper</b>	PA
<b>Internal air consumption</b>	Max. 1.5 l/min (depending on secondary pressure)
<b>Flow rate measurement</b>	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar

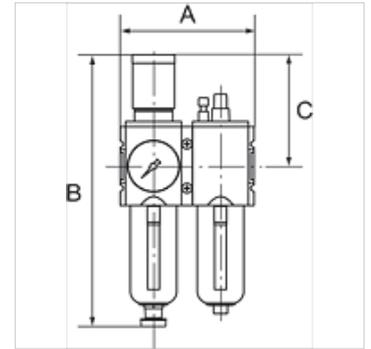

## Note

Further information on request

## Description

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

## Ordering information

The price does not include a key lock. Please order separately.

## Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	condensate outlet
K- 07 25 14 77	G 1/4	1800	104,0	225.0 mm	95,5	Semi
K- 07 25 14 78	G 3/8	1800	104,0	225.0 mm	95,5	Semi
K- 07 25 14 79	G 3/8	3500	126,0	257.0 mm	110,0	Semi
K- 07 25 14 80	G 1/2	3500	126,0	257.0 mm	110,0	Semi
K- 07 25 14 81	G 3/4	12000	170,0	329.0 mm	137,0	Semi
K- 07 25 14 82	G 1	12000	170,0	329.0 mm	137,0	Semi
K- 07 25 14 83	G 1/4	1800	104,0	243.0 mm	95,5	Auto
K- 07 25 14 84	G 3/8	1800	104,0	243.0 mm	95,5	Auto
K- 07 25 14 85	G 3/8	3500	126,0	274.0 mm	110,0	Auto
K- 07 25 14 86	G 1/2	3500	126,0	274.0 mm	110,0	Auto
K- 07 25 14 87	G 3/4	12000	170,0	343.0 mm	137,0	Auto
K- 07 25 14 88	G 1	12000	170,0	343.0 mm	137,0	Auto

## Accessories

K-STECKSCHLOSS Key lock

## Spare parts

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

13.05.2026

HANSA-FLEX AG

www.hansa-flex.com

1

# K-WTEH 2-TLG PC SCHU MANO HANSA

Service units, 2-piece with polycarbonate bowl, bowl guard and pressure gauge

**HANSA FLEX**

---