
K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

Properties

Input pressure	1.5 - 16 bar
Output pressure	0.5 - 8 bar
Temp. range	-10 °C to +50 °C
Media	Compressed air
Filter rating	5,00 µm
Connection thread	Material: Die-cast zinc
Container	Polycarbonate (with bayonet lock)
Filter element	Cellpor (PE)
Housing	Material: Grivory® (PA 66)
Diaphragm	NBR
Protective cage	Polyamide
Dropper	PA
Internal air consumption	Max. 1.5 l/min (depending on secondary pressure)
Flow rate measurement	At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar



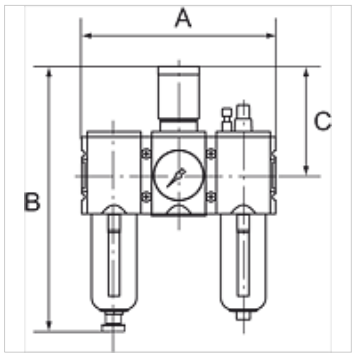

Note

Further information on request

Description

Two or three-piece service units with excellent flow rates in modern design.
Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Ordering information

The price does not include a key lock. Please order separately.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	condensate outlet
K- 07 25 14 37	G 1/4	1500	156,0	225.0 mm	95,5	Semi
K- 07 25 14 38	G 3/8	1500	156,0	225.0 mm	95,5	Semi
K- 07 25 14 39	G 3/8	3500	189,0	257.0 mm	110,0	Semi
K- 07 25 14 40	G 1/2	3500	189,0	257.0 mm	110,0	Semi
K- 07 25 14 41	G 3/4	12000	255,0	329.0 mm	137,0	Semi
K- 07 25 14 42	G 1	12000	255,0	329.0 mm	137,0	Semi
K- 07 25 14 43	G 1/4	1500	156,0	243.0 mm	95,5	Auto
K- 07 25 14 44	G 3/8	1500	156,0	243.0 mm	95,5	Auto
K- 07 25 14 45	G 3/8	3500	189,0	274.0 mm	110,0	Auto
K- 07 25 14 46	G 1/2	3500	189,0	274.0 mm	110,0	Auto
K- 07 25 14 47	G 3/4	12000	255,0	343.0 mm	137,0	Auto
K- 07 25 14 48	G 1	12000	255,0	343.0 mm	137,0	Auto

Accessories

K-STECKSCHLOSS	Key lock

Spare parts

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA
K-SCHALTTAFELMUTTER HANSA	Nut HANSA
K-DICHTSATZ HANSA	Set of seals HANSA

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.