


# K-MV G (NC) V 24 V DC 1 VA

Normally closed, (NC), pilot-operated, 24 V DC VA stainless steel

**HANSA FLEX**

## Properties

<b>Electrical connection</b>	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
<b>Thread description</b>	G thread acc. DIN EN ISO 228-1
<b>Media temperature</b>	max. 80 °C when using water or oils; max. 90 °C when using with air
<b>Protection IP</b>	IP 65
<b>Max. working pressure</b>	10 bar
<b>Sealant</b>	FPM
<b>Housing, valve seat</b>	Stainless steel 1.4301
<b>Internal parts</b>	Stainless steel

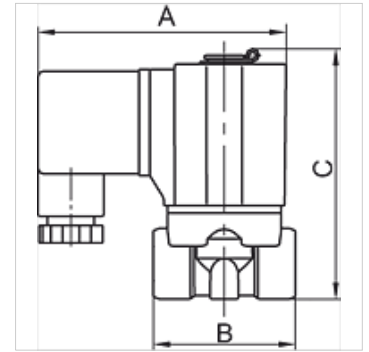

## Note

Further information on request

## Description

Standard series in two different versions: Directly operated, Pilot-operated

Item	Identification	min. working pressure (bar)	Thread	DN	A (mm)	B (mm)	C (mm)	Type
	K- 07 30 01 28	0,50	G 1/2	15,0	70,0	70,0	107,0	3
	K- 07 30 01 29	0,50	G 3/4	20,0	70,0	82,0	115,4	3
	K- 07 30 01 30	0,50	G 1	25,0	70,0	92,0	124,0	3