


# K-DRV W RAENDEL SCHNV OR

Unidirectional flow control valves with incoming air restriction, adjustable with knurled screw, angled, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 15 bar, coarse vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temp. range</b>	-20 °C to +80 °C
<b>Sealing surface</b>	Parallel version: O-ring in housing, Conical version: thread coating
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

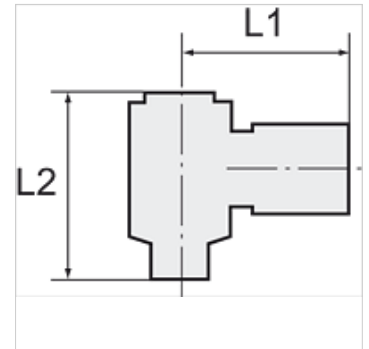

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

Identification	Thread	for external hose Ø	L1 (mm)	L2 (min.) (mm)	L2 (max.) (mm)	AF
K- 07 40 07 39	M 5	4 mm	20,0	29,0	31,9	8 mm
K- 07 40 07 40	M 5	6 mm	21,7	29,0	31,9	8 mm
K- 07 40 07 50	G 1/8	4 mm	22,3	37,8	44,0	10 mm
K- 07 40 07 51	G 1/8	6 mm	22,9	37,8	44,0	10 mm
K- 07 40 07 52	G 1/8	8 mm	25,3	37,8	44,0	10 mm
K- 07 40 07 49	G 1/8	10 mm	30,1	37,8	44,0	10 mm
K- 07 40 07 46	G 1/4	4 mm	24,0	44,0	51,0	14 mm
K- 07 40 07 47	G 1/4	6 mm	24,9	44,0	51,0	14 mm
K- 07 40 07 48	G 1/4	8 mm	28,4	44,0	51,0	14 mm
K- 07 40 07 44	G 1/4	10 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 45	G 1/4	12 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 55	G 3/8	8 mm	29,3	48,7	55,0	19 mm
K- 07 40 07 53	G 3/8	10 mm	32,5	48,7	55,0	19 mm
K- 07 40 07 54	G 3/8	12 mm	35,3	48,7	55,0	19 mm
K- 07 40 07 43	G 1/2	8 mm	32,3	53,0	59,2	24 mm
K- 07 40 07 41	G 1/2	10 mm	35,5	53,0	59,2	24 mm
K- 07 40 07 42	G 1/2	12 mm	36,3	53,0	59,2	24 mm