


K-MV G D 24 V DC

Normally closed, directly operated, 24 V DC (direct current)

HANSA FLEX

Características

Conexión eléctrica	ISO 4400. cable socket (Pg 11P)
Tipo de protecc.	IP65 (with connector socket fitted)
Temper. de medios	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Descripción de rosca	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Carcasa, asiento de vál.	Brass
Piezas int.	Stainless steel
Obturac.	Perbunan (NBR) or FKM

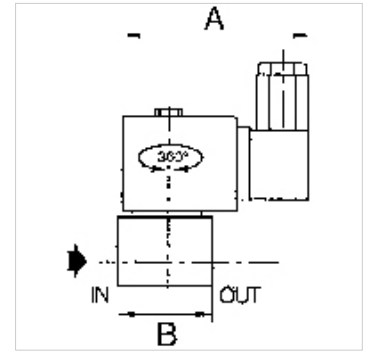

Nota

Otras especificaciones a petición.

Descripción

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artículo

Denominación	Rosca	Presión de servicio máx. (bar)	NW	Material obturador	A (mm)	B (mm)	Forma constructiva
K- 07 30 23 08	G 1/8	5	3,2	NBR	75,0	30,0	1
K- 07 30 23 10	G 1/8	5	3,2	FKM	75,0	30,0	1
K- 07 30 23 09	G 1/4	4	3,2	NBR	75,0	40,0	2
K- 07 30 23 11	G 1/4	4	3,2	FKM	75,0	40,0	2