


K-WTEH 3-TLG MET SICH TROPF MULTIFI

Service units, 3-piece with metal bowl and sight glass, metal sight dome

HANSA FLEX

Características

Presión de entrada	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temper. de medios	max. 60 °C
Temp. entorno	Max. 60 °C
Ancho de poros en elemento filtrante	5 µm (BG 1 / BG 2), 40 µm (BG 3)
Material obturador	NBR
Caperuza elást.	POM-brass
Carcasa	Die-cast zinc, Aluminium for G 1 variant
Suplem. de goteo	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Semi-automatic
Medic. valor de flujo	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

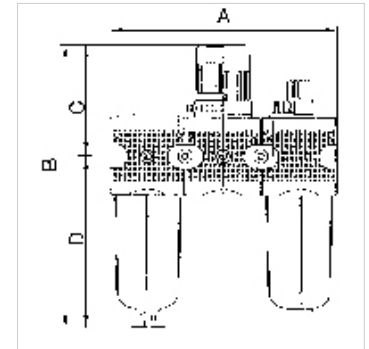

Nota

Otras especificaciones a petición.

Descripción

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

Indicaciones para pedidos

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Información adicional

1500 l/min: P1: 10 bar, P2: 7 bar, $\Delta p \leq 0.1$ bar.

Artículo

Denominación	Rosca	Rango de regulación	Flujo de paso (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Tamaño constructivo
K- 07 25 01 11	G 1/4	0.5 - 10 bar	1100	138,0	196,0 mm	67,0	129,0	6	1
K- 07 25 01 14	G 3/8	0.5 - 10 bar	1100	138,0	196,0 mm	67,0	129,0	10	1
K- 07 25 01 17	G 1/2	0.5 - 10 bar	3000	202,0	248,0 mm	97,0	151,0	15	2
K- 07 25 01 20	G 3/4	0.5 - 10 bar	3000	202,0	248,0 mm	97,0	151,0	20	2
K- 07 25 01 23	G 1	0.5 - 10 bar	11300	300,0	385,0 mm	128,0	257,0	25	3

Piezas de repuesto

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-VERSCHLEI-SATZ	Set of wearing parts