


K-DRG TRINKWASSER DVGW

Pressure regulators for drinking water, DVGW approved



Características

Presión de entrada	Max. 25 bar
Medios	Drinking water, nitrogen, compressed air, non-aggressive liquids
Temperatura de servicio	Max. 40 °C (transparent strainer cup), Max. 70 °C (brass strainer cup)
Material obturador	NBR
Caperuza elást.	Plastic
Carcasa	Brass
Taza de filtro	Plastic or brass
Otras especific.	DVGW Certificate (only for K-07250457 - K-07250462)

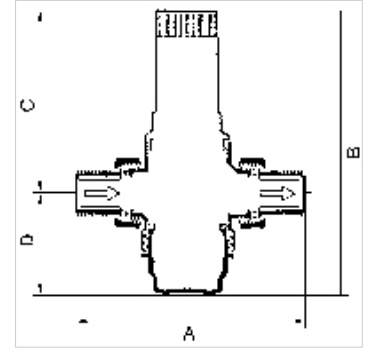

Nota

Otras especificaciones a petición.

Descripción

Diaphragm pressure regulators with pressure-reduced single-seated valve and built-in strainer. These pressure regulators, which are independent of inlet pressure, protect domestic water installations against excessive supply pressure. They can also be used for commercial or industrial purposes providing their specification is adequate.

Artículo

Denominación	Rosca	Rango de regulación	Flujo valor de kvs (m ³ /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 57	R 1/2	1.5 - 6 bar	2,4	140,0	147,0 mm	89,0	58,0
K- 07 25 04 58	R 3/4	1.5 - 6 bar	3,1	160,0	147,0 mm	89,0	58,0
K- 07 25 04 59	R 1	1.5 - 6 bar	7,6	180,0	175,0 mm	111,0	64,0
K- 07 25 04 60	R 1 1/4	1.5 - 6 bar	9,1	200,0	175,0 mm	111,0	64,0
K- 07 25 04 61	R 1 1/2	1.5 - 6 bar	12,6	225,0	299,0 mm	173,0	126,0
K- 07 25 04 62	R 2	1.5 - 6 bar	12,0	255,0	299,0 mm	173,0	126,0
K- 07 25 04 63	R 1/2	1.5 - 12 bar	2,4	140,0	152,0 mm	96,0	56,0
K- 07 25 04 64	R 3/4	1.5 - 12 bar	3,1	160,0	152,0 mm	96,0	56,0
K- 07 25 04 65	R 1	1.5 - 12 bar	7,6	180,0	217,0 mm	140,0	77,0
K- 07 25 04 66	R 1 1/4	1.5 - 12 bar	9,1	200,0	217,0 mm	140,0	77,0
K- 07 25 04 67	R 1 1/2	1.5 - 12 bar	12,6	225,0	285,0 mm	172,0	113,0
K- 07 25 04 68	R 2	1.5 - 12 bar	12,0	255,0	285,0 mm	172,0	113,0
K- 07 25 04 69	R 1/2	0.5 - 2 bar	2,4	140,0	204,0 mm	148,0	56,0
K- 07 25 04 70	R 3/4	0.5 - 2 bar	3,1	160,0	204,0 mm	148,0	56,0
K- 07 25 04 71	R 1	0.5 - 2 bar	7,6	180,0	262,0 mm	185,0	77,0

Piezas de repuesto

K-VENTILAUUSTAUSCHSATZ	Valve replacement kit
K-ERSATZSIEBE	Replacement strainer
K-DOPPELRINGSCHLUESSEL	Double ring spanner
K-VERSCHLEI-SATZ DRCKREGLER	Wearing part set consisting of: 2x cap nuts, 2x screw fittings, 2x sealing rings