


K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Características

Medios	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Presión de funcionamiento	Max. 10 bar
Presión de reacción	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Rango de temperatura	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Montaje	Heads / jacket with self-tapping screws
Vást.pistón	C45 steel, hard chrome-plated
Tubo	Anodised aluminium jacket with integrated T-slots
Pistón	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Material obturador	NBR

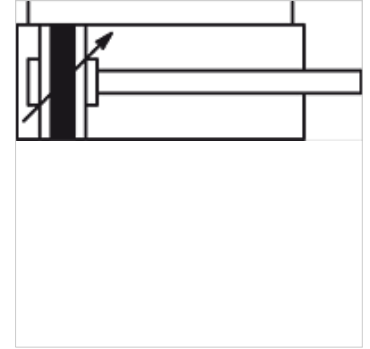

Nota

Otras especificaciones a petición.

Descripción

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply.
Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides.
The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

Artículo

Denominación	Ø pistón	Carrera (mm)	Conexión	Ø Vást.pistón (mm)	Rosca exterior de vást. pistón
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5



Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Artículo

Denominación	Ø pistón	Carrera (mm)	Conexión	Ø Vást.pistón (mm)	Rosca exterior de vást. pistón
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5
K- 07 15 16 26	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 16 27	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 16 28	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 16 29	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 16 30	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 16 31	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 16 32	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 16 33	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 16 34	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 16 35	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 16 36	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 16 37	63 mm	320	G 3/8	20	M 16 x 1.5
K- 07 15 16 38	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 16 39	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 16 40	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 16 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 16 42	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 16 43	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 16 44	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 16 45	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 16 46	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 16 47	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 16 48	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 16 49	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 16 50	80 mm	320	G 3/8	25	M 20 x 1.5
K- 07 15 16 51	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 16 52	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 16 53	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 16 54	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 64	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 15 65	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 15 66	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 15 67	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 15 68	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 15 69	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 15 70	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 15 71	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 15 72	100 mm	320	G 1/2"	25	M 20 x 1.5
K- 07 15 15 73	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 15 74	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 15 75	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 15 76	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 15 77	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 15 78	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 15 79	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 15 80	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 15 81	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 15 82	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 15 83	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 15 84	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 15 85	125 mm	320	G 1/2"	32	M 27 x 2
K- 07 15 15 86	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 15 87	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 15 88	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 15 89	125 mm	800	G 1/2"	32	M 27 x 2

Accesorios

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model



Hemos revisado cuidadosamente esta publicación, pero no obstante no podemos excluir los errores y no garantizamos los datos que constan aquí.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

