


K-MV G (NC) D 24 V DC H

Normally closed, (NC), directly operated, 24 V DC, for high pressures

HANSA FLEX

Características

| | |
|---------------------------------|---|
| Conexión eléctrica | device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket |
| Descripción de rosca | G thread acc. DIN EN ISO 228-1 |
| Temper. de medios | max. 80 °C when using water or oils; max. 90 °C when using with air |
| Tipo de protecc. | IP 65 |
| presión de servicio máx. | 30 bar |
| Material obturador | FPM |
| Carcasa, asiento de vál. | Stainless steel 1.4301 |
| Piezas int. | Stainless steel |

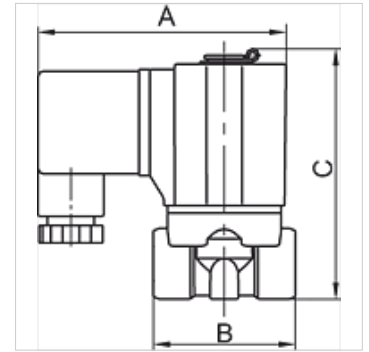

Nota

Otras especificaciones a petición.

Descripción

Standard series in two different versions: Directly operated, Pilot-operated

Artículo

| Denominación | Rosca | NW | A (mm) | B (mm) | C (mm) | Forma constructiva |
|----------------|-------|-----|-----------|-----------|-----------|--------------------|
| K- 07 30 01 24 | G 1/8 | 1,5 | 70,0 | 40,0 | 70,7 | 1 |
| K- 07 30 01 25 | G 1/4 | 1,5 | 70,0 | 40,0 | 70,7 | 1 |
| K- 07 30 01 26 | G 3/8 | 3,0 | 85,0 | 52,0 | 87,0 | 1 |
| K- 07 30 01 27 | G 1/2 | 3,0 | 85,0 | 52,0 | 87,0 | 1 |