


K-T-STECK VERS DRE AG OR 2

Male branch tees, swivel type, parallel male thread with O-ring

HANSA FLEX

Características

| | |
|---------------------------|--|
| Presión de funcionamiento | Max. 15 bar, coarse vacuum |
| Campo de aplicación | Air, vacuum |
| Mangueras recomendadas | PU or PA (nylon) |
| Medios | Compressed air and all gases or liquids that are compatible with the materials |
| Rango de temperatura | -20 °C to +80 °C |
| Superficie de obturación | Parallel version: O-ring in housing |
| Material | Plastic, Nickel plated brass |
| Anillo de presión | Plastic |

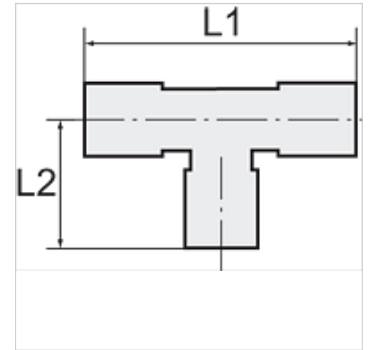

Nota

Otras especificaciones a petición.

Descripción

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artículo

| Denominación | Rosca | para Ø exterior de tubo flexible | L1 (mm) | L2 (mm) | SW |
|----------------|-------|----------------------------------|------------|------------|-------|
| K- 07 40 02 59 | M 5 | 4 mm | 36,0 | 21,1 | 8 mm |
| K- 07 40 02 60 | M 5 | 6 mm | 40,0 | 22,2 | 8 mm |
| K- 07 40 02 71 | G 1/8 | 4 mm | 36,0 | 19,0 | 14 mm |
| K- 07 40 02 72 | G 1/8 | 6 mm | 40,0 | 20,1 | 14 mm |
| K- 07 40 02 73 | G 1/8 | 8 mm | 45,4 | 25,7 | 14 mm |
| K- 07 40 02 68 | G 1/4 | 4 mm | 36,0 | 19,0 | 17 mm |
| K- 07 40 02 69 | G 1/4 | 6 mm | 40,0 | 20,1 | 17 mm |
| K- 07 40 02 70 | G 1/4 | 8 mm | 45,4 | 21,7 | 17 mm |
| K- 07 40 02 66 | G 1/4 | 10 mm | 53,8 | 27,6 | 17 mm |
| K- 07 40 02 67 | G 1/4 | 12 mm | 58,6 | 28,9 | 17 mm |
| K- 07 40 02 77 | G 3/8 | 6 mm | 40,0 | 21,2 | 20 mm |
| K- 07 40 02 78 | G 3/8 | 8 mm | 45,4 | 22,8 | 20 mm |
| K- 07 40 02 74 | G 3/8 | 10 mm | 53,8 | 24,6 | 20 mm |
| K- 07 40 02 75 | G 3/8 | 12 mm | 58,6 | 25,9 | 20 mm |
| K- 07 40 02 76 | G 3/8 | 16 mm | 69,0 | 34,2 | 20 mm |
| K- 07 40 02 64 | G 1/2 | 6 mm | 40,0 | 23,6 | 24 mm |
| K- 07 40 02 65 | G 1/2 | 8 mm | 45,4 | 25,2 | 24 mm |
| K- 07 40 02 61 | G 1/2 | 10 mm | 53,8 | 26,5 | 24 mm |
| K- 07 40 02 62 | G 1/2 | 12 mm | 58,6 | 27,8 | 24 mm |
| K- 07 40 02 63 | G 1/2 | 16 mm | 69,0 | 30,9 | 24 mm |