
# K-WV 3/2 ELK 24 VDC HANSA

3/2-way valves, electrically operated, with 24 VDC / 2.5 W solenoid

## Omadused

| | |
|---|---|
| **Sisendrõhk** | 2 - 10 bar |
| **Temperatuuri ulatus** | -10 °C to +50 °C |
| **Vahendid** | Suruõhk |
| **Vahelduvpinge pingutusvõimsus 50Hz** | 2,2 VA |
| **Sisselülituse kestvus** | ED 100 % |
| **Elektriühendus** | Connector type C, ISO 15217, 2 poles + PE |
| **Võimsus 50 Hz vahelduvpingel** | 1,6 VA |
| **Võimsustarve DC** | 2,5 W |
| **Kaitse tüüp** | IP 65 |
| **Ühenduskeere** | Material: Die-cast zinc |
| **Korpus** | Material: Grivory® (PA 66) |
| **Läbivoolu väärtuse mõõtmine** | At P2 = 6 bar, pressure drop Δp = 1 bar |



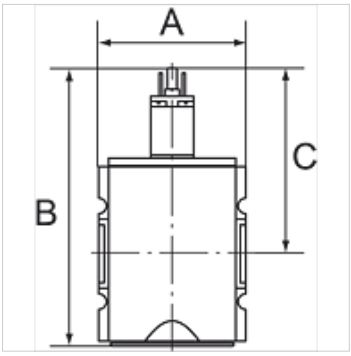


## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

## Tellimisinfo

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Artikkel

| Märgistus | Keere | Väljund | Läbivool (L/min) | A (mm) | B | C (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 11 05** | G 1/4 | 1/4 | 2000 | 52,0 | 117,8 mm | 84,8 |
| **K- 07 25 11 06** | G 3/8 | 1/4 | 2000 | 52,0 | 117,8 mm | 84,8 |
| **K- 07 25 11 31** | G 3/8 | 1/2 | 4500 | 63,0 | 150,3 mm | 93,8 |
| **K- 07 25 11 32** | G 1/2 | 1/2 | 4500 | 63,0 | 150,3 mm | 93,8 |
| **K- 07 25 11 37** | G 3/4 | 1/2 | 12500 | 85,0 | 177,7 mm | 110,7 |
| **K- 07 25 11 38** | G 1 | 1/2 | 12500 | 85,0 | 177,7 mm | 110,7 |

## Lisatarvikud

| | |
|---|---|
| **K-SCHALLDAE SINTERBR S** | Silencers, sintered bronze, slotted |
| **K-SCHALLDAE SINTERBR GE MS1** | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Varuosad

| | |
|---|---|
| **K-HALTERBAUSATZ HANSA** | Holder HANSA |
| **K-VORSTEUERVENTIL HANSA** | Replacement solenoid HANSA |
| **K-GERAETESTECKER FORM C** | Connector |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*