
K-VTST 2 AB MS

Distributor pieces, brass, with 2 outlets

Caractéristiques

Raccord	G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing
Pression de service	maxi 10 bar



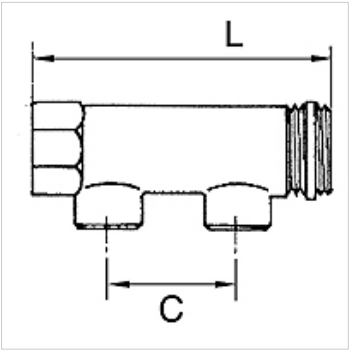

Remarque

Autres informations sur demande.

Description

For assembling compressed air taps.End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Article

Désignation	Raccord de sortie	Raccord d'entrée	C (mm)	L (mm)
K- 07 40 40 49	2 x 1/2 male	2 x 3/4	50,0	110,0
K- 07 40 40 50	2 x 1/2 female	2 x 3/4	50,0	110,0
K- 07 40 40 51	2 x 1/2 male	2 x 1	50,0	113,0
K- 07 40 40 52	2 x 1/2 female	2 x 1	50,0	113,0
K- 07 40 40 53	2 x 1/2 male	2 x 1 1/4	60,0	137,0
K- 07 40 40 54	2 x 1/2 female	2 x 1 1/4	60,0	137,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.