


K-DRG TRINKWASSER DVGW

Pressure regulators for drinking water, DVGW approved



Caractéristiques

Pression d'entrée	Max. 25 bar
Médiums	Drinking water, nitrogen, compressed air, non-aggressive liquids
Température de service	Max. 40 °C (transparent strainer cup), Max. 70 °C (brass strainer cup)
Matériau étanche	NBR
Logement de ressort	Plastic
Boîtier	Brass
Crépine	Plastic or brass
Autres indications	DVGW Certificate (only for K-07250457 - K-07250462)

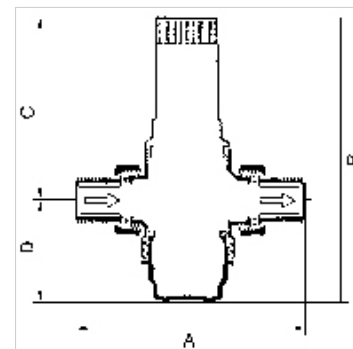

Remarque

Autres informations sur demande.

Description

Diaphragm pressure regulators with pressure-reduced single-seated valve and built-in strainer. These pressure regulators, which are independent of inlet pressure, protect domestic water installations against excessive supply pressure. They can also be used for commercial or industrial purposes providing their specification is adequate.

Article

Désignation	Filets	Plage de régulation	Débit valeur kvs (m ³ /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 57	R 1/2	1.5 - 6 bar	2,4	140,0	147,0 mm	89,0	58,0
K- 07 25 04 58	R 3/4	1.5 - 6 bar	3,1	160,0	147,0 mm	89,0	58,0
K- 07 25 04 59	R 1	1.5 - 6 bar	7,6	180,0	175,0 mm	111,0	64,0
K- 07 25 04 60	R 1 1/4	1.5 - 6 bar	9,1	200,0	175,0 mm	111,0	64,0
K- 07 25 04 61	R 1 1/2	1.5 - 6 bar	12,6	225,0	299,0 mm	173,0	126,0
K- 07 25 04 62	R 2	1.5 - 6 bar	12,0	255,0	299,0 mm	173,0	126,0
K- 07 25 04 63	R 1/2	1.5 - 12 bar	2,4	140,0	152,0 mm	96,0	56,0
K- 07 25 04 64	R 3/4	1.5 - 12 bar	3,1	160,0	152,0 mm	96,0	56,0
K- 07 25 04 65	R 1	1.5 - 12 bar	7,6	180,0	217,0 mm	140,0	77,0
K- 07 25 04 66	R 1 1/4	1.5 - 12 bar	9,1	200,0	217,0 mm	140,0	77,0
K- 07 25 04 67	R 1 1/2	1.5 - 12 bar	12,6	225,0	285,0 mm	172,0	113,0
K- 07 25 04 68	R 2	1.5 - 12 bar	12,0	255,0	285,0 mm	172,0	113,0
K- 07 25 04 69	R 1/2	0.5 - 2 bar	2,4	140,0	204,0 mm	148,0	56,0
K- 07 25 04 70	R 3/4	0.5 - 2 bar	3,1	160,0	204,0 mm	148,0	56,0
K- 07 25 04 71	R 1	0.5 - 2 bar	7,6	180,0	262,0 mm	185,0	77,0

Pièces de rechange

K-VENTILAUUSTAUSCHSATZ	Valve replacement kit
K-ERSATZSIEBE	Replacement strainer
K-DOPPELRINGSCHLUESSEL	Double ring spanner
K-VERSCHLEI-SATZ DRCKREGLER	Wearing part set consisting of: 2x cap nuts, 2x screw fittings, 2x sealing rings