


K-STECKVERBINDU 2

Straight push-in connector

HANSA FLEX

Caractéristiques

| | |
|------------------------|---------------------|
| Pression de service | Max. 16 bar |
| Température de service | -20 °C to +150 °C |
| Matériau | Laiton nickelé |
| Bague de pression | Nickel-plated brass |
| Circlip | Stainless steel |

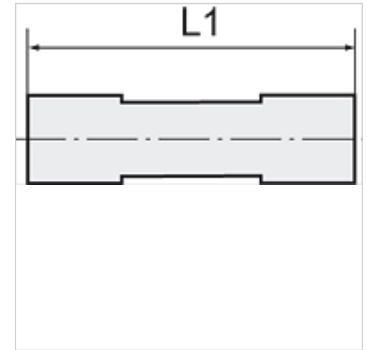

Remarque

Autres informations sur demande.

Description

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Article

| Désignation | pour Ø ext. du tuyau | L1 (mm) |
|----------------|----------------------|------------|
| K- 07 40 27 49 | 4 mm | 31,0 |
| K- 07 40 27 50 | 6 mm | 33,0 |
| K- 07 40 27 51 | 8 mm | 37,0 |
| K- 07 40 27 52 | 10 mm | 39,0 |
| K- 07 40 47 74 | 12 mm | 43,0 |
| K- 07 40 40 91 | 14 mm | 47,5 |