


Karakteristike

| | |
|--------------------|--------------------------------|
| Oblik brtve 1 | 60° unutarnji konus |
| Priključak 1 | BSP vanjski navoj, cilindrični |
| Priključak 2 | UN/UNF vanjski navoji |
| Oblik brtve 2 | 74° vanjski konus |
| Izvedba | Spojni nastavci |
| Oblik izrade | ravno |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

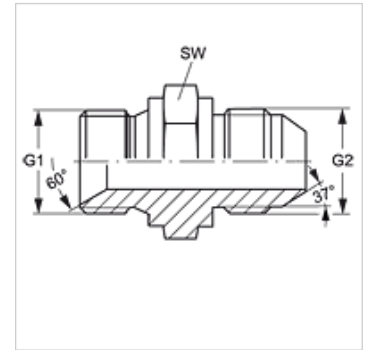

Artikli

| Naziv | G1 | G2 | SW (mm) |
|---------------|---------------|----------------|------------|
| G HB 02 HJ 10 | G 1/8" - 28 | 7/8" - 14 UNF | 24 |
| G HB 04 HJ 10 | G 1/4" - 19 | 7/8" - 14 UNF | 24 |
| G HB 08 HJ 05 | G 1/2" -14 | 1/2" -20 UNF | 27 |
| G HB 08 HJ 14 | G 1/2" -14 | 1,3/16" -12 UN | 32 |
| G HB 08 HJ 16 | G 1/2" -14 | 1,5/16" -12 UN | 41 |
| G HB 10 HJ 08 | G 5/8" -14 | 3/4" - 16 UNF | 27 |
| G HB 10 HJ | G 5/8" -14 | 7/8" - 14 UNF | 27 |
| G HB 10 HJ 12 | G 5/8" -14 | 1.1/16" -12 UN | 32 |
| G HB 10 HJ 16 | G 5/8" -14 | 1,5/16" -12 UN | 41 |
| G HB 12 HJ 06 | G 3/4" -14 | 9/16" - 18 UNF | 32 |
| G HB 12 HJ 14 | G 3/4" -14 | 1,3/16" -12 UN | 32 |
| G HB 12 HJ 20 | G 3/4" -14 | 1,5/8" -12 UN | 50 |
| G HB 16 HJ 08 | G 1" -11 | 3/4" - 16 UNF | 41 |
| G HB 16 HJ 10 | G 1" -11 | 7/8" - 14 UNF | 41 |
| G HB 16 HJ 14 | G 1" -11 | 1,3/16" -12 UN | 41 |
| G HB 20 HJ 12 | G 1,1/4" - 11 | 1.1/16" -12 UN | 50 |
| G HB 24 HJ 16 | G 1,1/2" - 11 | 1,5/16" -12 UN | 55 |
| G HB 24 HJ 32 | G 1,1/2" - 11 | 2,1/2" -12 UN | 60 |
| G HB 32 HJ 24 | G 2" -11 | 1,7/8" -12 UN | 60 |
| G HB 32 HJ | G 2" -11 | 2,1/2" -12 UN | 60 |

SW = širina ključa