

# TR HL

Nazuvica za zabijanje, CEL

**HANSA FLEX**

## Karakteristike


**Priključak 1** metrički vanjski navoji, cilindrični

**Oblik brtve 1** 24° unutarnji konus

**Norma** ISO 8434-1

**Materijal** Čelik

**Površinska zaštita** galvanski premaz

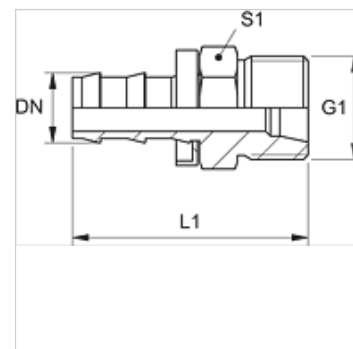

## Artikli

| Naziv       | DN | Veličina | Col   | G1         | za vanjski Ø cijevi (mm) | L1 (mm) |
|-------------|----|----------|-------|------------|--------------------------|---------|
| TR 04 HL    | 5  | 3        | 3/16" | M 12 x 1,5 | 6                        | 30      |
| TR 06 HL    | 6  | 4        | 1/4"  | M 14 x 1,5 | 8                        | 31      |
| TR 08 HL 06 | 8  | 5        | 5/16" | M 14 x 1,5 | 8                        | 38      |
| TR 08 HL    | 8  | 5        | 5/16" | M 16 x 1,5 | 10                       | 38      |
| TR 10 HL 08 | 10 | 6        | 3/8"  | M 16 x 1,5 | 10                       | 38      |
| TR 10 HL    | 10 | 6        | 3/8"  | M 18 x 1,5 | 12                       | 39      |
| TR 13 HL    | 12 | 8        | 1/2"  | M 22 x 1,5 | 15                       | 52      |