# K-GRUNDEJEKTION SBP-C


Basic ejectors »SBP-C« with blow-off valve, with integrated silencer

HANSA-FLEX

## Karakteristike

| | |
|---|---|
| **Karakteristike** | Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)<br>Connection of compressed air and vacuum with push-in coupling<br>Basic housing with connection facility for a vacuum switch<br>Maximum suction capacity with minimum compressed air consumption<br>Minimum size, low weight<br>Various power ratings for optimised air consumption |
| **Primjena** | For universal use in handling systems with very high dynamic movements<br>Handling all kinds of air-tight components<br>For use in separation systems where space is restricted.<br>\nConstruction of ejector blocks for centralised or decentralised individual control of suction pads. |
| **Sustav sapnica** | Brass |
| **Priključak** | Push-in coupling |
| **Prigušivač zvuka** | Plastic |
| **Osnovno tijelo** | Impact-resistant plastic |



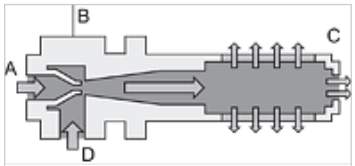


## Napomena

Drugi podatci na zahtjev.

## Opis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Artikl

| Naziv | Veličina sapnice | Položaj mirovanja usisnog ventila | Priključak za komprimirani zrak | Vakuumski priključak | Dimenzije |
|---|---|---|---|---|---|
| **K- 07 45 01 19** | 1,0 | NO | 6 mm | 8 mm | 142mm x 15mm x 50mm |
| **K- 07 45 01 21** | 1,5 | NO | 6 mm | 8 mm | 142mm x 15mm x 50mm |
| **K- 07 45 01 23** | 2,0 | NO | 8 mm | 10 mm | 228mm x 20mm x 72mm |
| **K- 07 45 01 25** | 2,5 | NO | 8 mm | 10 mm | 228mm x 20mm x 72mm |

## Pribor

| | |
|---|---|
| **K-ERSATZSCHALLDAEMPFER 1** | Replacement silencers |
| **K-GRUNDPLATTEN 1** | Base plate |
| **K-BEFESTIGUNGSSAETZE 1** | Mounting kit |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*