


# K-DRG DRVS MULTIFIX

Pressure regulators with pressure supply at both ends

**HANSA FLEX**

## Karakteristike

|                              |  |
|------------------------------|--|
| Ulazni tlak                  | Max. 16 bar  |
| Temperatura medija           | max. 60 °C   |
| Okolna temperatura           | Max. 60 °C   |
| Brtveni materijal            | NBR  |
| Pokrov s oprugom             | POM-brass  |
| Kućište                      | Die-cast zinc  |
| Mjerenje vrijednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

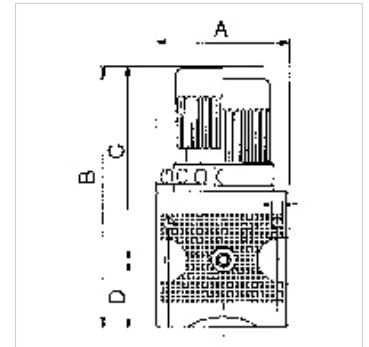

## Napomena

Drugi podatci na zahtjev.

## Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.  
<br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

## Napomene uz narudžbu

The port for the output pressure (P2) is on the rear! K-07250031: G 1/4, K-07250034: G 1/2. Lockable pressure regulators K-07250030 available on request.

## Artikli

| Naziv          | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Veličina |
|----------------|-------|-----------------------|----------------|--------|----------|--------|--------|----|----------|
| K- 07 25 00 31 | G 1/4 | 0.1 - 3 bar           | 2000           | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1        |
| K- 07 25 00 32 | G 1/4 | 0.2 - 6 bar           | 2000           | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1        |
| K- 07 25 00 30 | G 1/4 | 0.5 - 10 bar          | 2000           | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1        |
| K- 07 25 00 34 | G 1/2 | 0.1 - 3 bar           | 5500           | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2        |
| K- 07 25 00 35 | G 1/2 | 0.2 - 6 bar           | 5500           | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2        |
| K- 07 25 00 33 | G 1/2 | 0.5 - 10 bar          | 5500           | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2        |

## Rezervni dijelovi

|                          |                      |
|--------------------------|----------------------|
| K-HALTERBAUSATZ          | Holder               |
| K-SCHALTTAFELMÜTTER      | Nut                  |
| K-HALTERBAUSATZ MULTIFIX | Holder               |
| K-KOPPELPAKET MEHR       | Coupling packet      |
| K-KOPPELPAKET SCHMA      | Coupling packet      |
| K-VERSCHLEI-SATZ         | Set of wearing parts |