
# K-WTEH 2-TLG MET SICH TROPF VARIOBL

Service units, 2-piece with metal bowl, incl. sight glass and metal sight dome

## Karakteristike

| | |
|---|---|
| **Ulazni tlak** | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| **Temperatura medija** | max. 50 °C |
| **Okolna temperatura** | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| **Veličina pora u filtarskom elementu** | 40 µm |
| **Brtveni materijal** | NBR |
| **Pokrov s oprugom** | POM |
| **Kućište** | Die-cast zinc |
| **Membrana** | NBR |
| **Nastavak za kapanje** | PA |
| **Drain valve** | Manual |
| **Mjerenje vrijednosti protoka** | At P1 = 10 bar, P2 = 6 bar and pressure drop Δp = 1 bar |



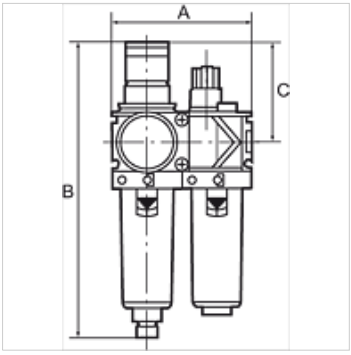


## Napomena

Drugi podatci na zahtjev.

## Opis

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Napomene uz narudžbu

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Dodatne informacije

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

## Artikl

| Naziv | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B | C (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 13 86** | G 1/4 | 0.5 - 10 bar | 1500 | 96,0 | 203,0 mm | 68,0 |
| **K- 07 25 13 88** | G 3/8 | 0.5 - 10 bar | 1800 | 96,0 | 203,0 mm | 68,0 |
| **K- 07 25 13 90** | G 1/2 | 0.5 - 10 bar | 3400 | 140,0 | 273,0 mm | 98,0 |
| **K- 07 25 13 92** | G 3/4 | 0.5 - 10 bar | 5000 | 140,0 | 273,0 mm | 98,0 |
| **K- 07 25 13 94** | G 1 | 0.5 - 10 bar | 5000 | 194,0 | 273,0 mm | 98,0 |

## Rezervni dijelovi

| | |
|---|---|
| **K-VERSCHLEI-SATZ VARIOBLOC** | Set of wearing parts |
| **K-FILTERELEMENT VARIOBLOC** | Filter element |
| **K-ERSATZBEHAELTER VARIOBLOC POLY** | Spare tank Polycarbonat |
| **K-TROPFAUFSATZ VARIOBLOC** | Drip attachment |
| **K-ABLASSVENTIL AUTO** | Fully-automatic drain valve with Adapter G 1/8 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*