
K-SSV BR

Angle-seat valves with piston actuator

Tulajdonságok

Nyomáskülönbség	0 - 16 bar
Közeghőmérséklet	-10 °C to +180 °C
Vezérlőlevegő csatlakozás	G 1/8
Vezérlőközeg hőmérséklet	max. +60 °C
Környezeti hőmérséklet	-20 °C to +70 °C
megengedett statikus nyomás	Max. 16 bar
Szelepház	Bronze
Összekötő-darab	Stainless steel
Vezérlőgomb	Polyamide (glass fibre-reinforced)
Dugattyú	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
Orsó	Stainless steel
Tömítő anyag	PTFE



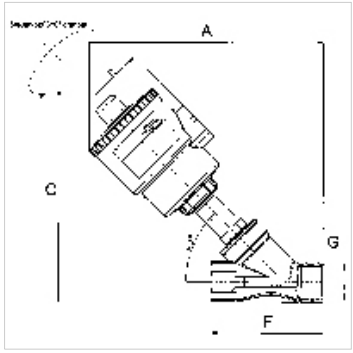

Megjegyzés

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.
További adatokért vegye fel a kapcsolatot.

Leírás

Angle-seat valves with external pilot control and a self-aligning valve discfor neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

További információk

Other versions e.g. for steam on request
Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

Cikk

Megnevezés	A (mm)	C (mm)	F (mm)	Menet	max. üzemi nyomáskülönbség (bar)	min. vezérlőnyomás	max. vezérlőnyomás
K- 07 30 25 24	163,0	153,0	65,0	G 1/2	16	4	10
K- 07 30 25 25	173,0	163,0	75,0	G 3/4	10	4	10
K- 07 30 25 26	191,0	181,0	75,0	G 3/4	16	4	10
K- 07 30 25 27	206,0	196,0	90,0	G 1	11	4	10
K- 07 30 25 28	246,0	236,0	90,0	G 1	16	4	8
K- 07 30 25 29	255,0	245,0	110,0	G 1 1/4	14	4	8
K- 07 30 25 30	270,0	264,0	120,0	G 1 1/2	11	4	8
K- 07 30 25 31	306,0	300,0	120,0	G 1 1/2	16	4	8
K- 07 30 25 32	316,0	311,0	150,0	G 2	10	4	8

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.