



K-VERBINDER POM

Unions

HANSA FLEX

Caratteristiche

Pressione di lavoro	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura d'esercizio	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materiale	Acetalpolymerisat (POM)
Materiale di tenuta	NBR

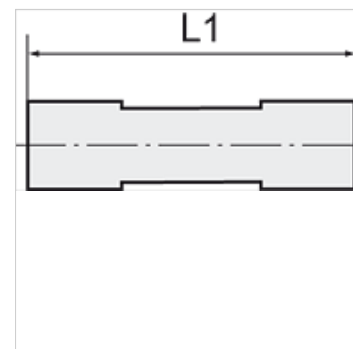

Nota

Altri dati su richiesta.

Descrizione

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)
K- 07 40 28 41	4 mm	33,6
K- 07 40 28 42	5 mm	34,6
K- 07 40 28 43	6 mm	36,9
K- 07 40 28 44	8 mm	40,0
K- 07 40 28 45	10 mm	43,9
K- 07 40 28 46	12 mm	55,8
K- 07 40 28 47	15 mm	62,0
K- 07 40 28 48	18 mm	66,5
K- 07 40 28 49	22 mm	72,2
K- 07 40 28 50	28 mm	95,6