
K-T-STECK VB 1

Union tees

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +150 °C
Materiale	Ottone nichelato
Anello di compressione	Nickel-plated brass
Anello elastico	Stainless steel



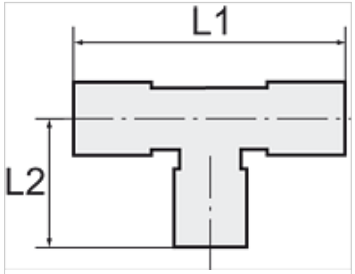

Nota

Altri dati su richiesta.

Descrizione

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)
K- 07 40 27 57	4 mm	34,0	17,0
K- 07 40 27 58	6 mm	39,0	19,5
K- 07 40 27 59	8 mm	46,0	23,0
K- 07 40 27 60	10 mm	50,0	25,0
K- 07 40 47 81	12 mm	54,0	27,0
K- 07 40 47 82	14 mm	62,0	31,0

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.