


# K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

**HANSA FLEX**

## Savybės

|                             |   |
|-----------------------------|---|
| <b>Savybės</b>              | Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)<br>Connection of compressed air and vacuum with push-in coupling<br>Basic housing with connection facility for a vacuum switch<br>Maximum suction capacity with minimum compressed air consumption<br>Minimum size, low weight<br>Various power ratings for optimised air consumption |
| <b>Panaudojimas</b>         | For universal use in handling systems with very high dynamic movements<br>Handling all kinds of air-tight components<br>For use in separation systems where space is restricted.<br>Construction of ejector blocks for centralised or decentralised individual control of suction pads.   |
| <b>Purkštukų sistema</b>    | Brass   |
| <b>Jungtis</b>              | Push-in coupling  |
| <b>Garo slopintuvus</b>     | Plastic   |
| <b>Pagrindinis korpusas</b> | Impact-resistant plastic  |

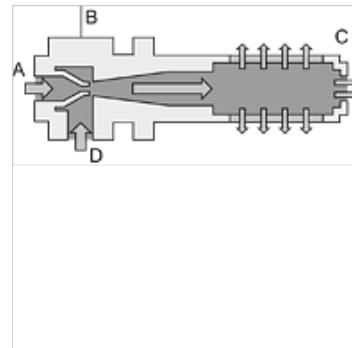

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Apaščias

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Prekė

| Pavadinimas   | Purkštuko dydis | Siurbiamojo vožtovo rimties padėtis | Suslėgtojo oro jungtis | Vakuumo jungtis | Matmuo              |
|---------------|-----------------|-------------------------------------|------------------------|-----------------|---------------------|
| K-07 45 01 20 | 1,0             | NO                                  | 6 mm                   | 8 mm            | 142mm x 15mm x 50mm |
| K-07 45 01 22 | 1,5             | NO                                  | 6 mm                   | 8 mm            | 142mm x 15mm x 50mm |
| K-07 45 01 24 | 2,0             | NO                                  | 8 mm                   | 10 mm           | 228mm x 20mm x 72mm |
| K-07 45 01 26 | 2,5             | NO                                  | 8 mm                   | 10 mm           | 228mm x 20mm x 72mm |

## Priedai

|                          |                       |
|--------------------------|-----------------------|
| K-ERSATZSCHALLDAEMPFER 1 | Replacement silencers |
| K-GRUNDPLATTEN 1         | Base plate            |
| K-BEFESTIGUNGSSAETZE 1   | Mounting kit          |