


# K-PROP VENTIL LU GA WA 24 V DC

Proportional valves for controlling the flow of air / gas / water / oil, 24 VDC, closed when de-energised

**HANSA FLEX**

## Savybės

Temperatūros diapazonas	Max. 50 °C (G 1/8), Max. 90 °C (G 1/4, G 3/8)
Medžiagos	Air, neutral gases, water, oil
Slėgio diapazonas	Vacuum (max. 8 bar)
Valdymas	Via plug amplifier 0 to 10 V, 0 to 20 mA, 4 to 20 mA
„Failsafe“ veikimas	Tight closure in case of loss of voltage
Korpusas, vožtuvo lizdas	Brass
Vidinės dalys	Stainless steel
Vožtuvo lėkštė	FKM
Sandarinio medžiaga	FKM

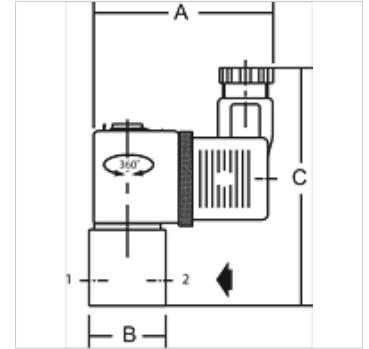

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Ever increasing requirements with regard to quality, precision, productivity, convenience, user friendliness and service represent tough challenges for industrial plant and production facilities. These challenges can only be mastered if physical quantities such as temperature, pressure, force, speed, torque, etc. are optimally adapted to the operating conditions of each installation. Stepless adjustment of these parameters is vital. Proportional valves allow the medium to be varied as a function of an electronic input variable. By linking these valves to the electronics, it is possible to improve their accuracy and broaden their range of applications. A pressure regulator, for instance, needs to be suitable for several pressure ranges without having to adjust the pressure manually. Proportional valves control the output pressure in a closed control loop proportionally to the selected setpoint signal. This output pressure, in other words, is continually compared with the specified setpoint and automatically adjusted according to actual parameter values.

## Papildoma informacija

We recommend combining these proportional valves with a plug amplifier, type K-07250999 or K-07251000  
We recommend combining these proportional valves with a plug amplifier, type K-07250999 or K-07251000

## Prekė

Pavadinimas	Jungtis	DN	maks. eksploatacinio slėgio diferencialas (bar)	A (mm)	B	C (mm)
K- 07 25 09 89	G 1/8	1	5	59,0	25,0 mm	78,0
K- 07 25 09 90	G 1/8	2	4	59,0	25,0 mm	78,0