



# K-WMAV 3/2 GEFUE ENTLUEF SCHL GEW

3/2-way solenoid valves, conveyed exhaust, pipe (input) - thread (output)

**HANSA FLEX**

## Savybės

|                            |  |
|----------------------------|--|
| Darbinis slėgis            | 2.5 - 7 bar  |
| Srautas 6,3 bar, p = 1 bar | 380 NI/min (Ø 6), 700 NI/min (Ø 8)   |
| Galia                      | 1,2 W  |
| Įtampa                     | 24 V DC  |
| Temperatūros diapazonas    | -20 °C to +60 °C   |
| Korpusas                   | Technopolymer  |
| Vidinės dalys              | nickel-plated brass, brass, technopolymer, stainless steel   |
| Sandaravimo medžiaga       | NBR  |
| Montavimas                 | Wall mounting (housing with drilled holes)<br>Bracket mounting (mounting bracket available)<br>Panel mounting (with bracket or lock nut) |
| Simbolis                   | on the housing   |

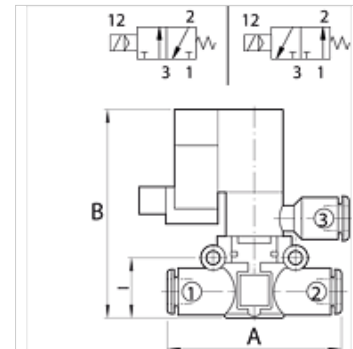

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. All components can be installed in parallel, in series, in a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

## Prekė

| Pavadinimas    | Sriegis | žarnos Ø (mm) | Funkcija | A (mm) | B (mm) | l (mm) |
|----------------|---------|---------------|----------|--------|--------|--------|
| K- 07 15 14 03 | G 1/8   | 6             | NC       | 58,3   | 57,5   | 14,6   |
| K- 07 15 14 04 | G 1/8   | 8             | NC       | 66,4   | 63,5   | 18,7   |
| K- 07 15 14 01 | G 1/4   | 6             | NC       | 61,3   | 57,5   | 14,6   |
| K- 07 15 14 02 | G 1/4   | 8             | NC       | 70,8   | 63,5   | 18,7   |
| K- 07 15 14 05 | G 3/8   | 8             | NC       | 72,4   | 63,5   | 18,7   |
| K- 07 15 14 08 | G 1/8   | 6             | NO       | 58,3   | 57,5   | 14,6   |
| K- 07 15 14 09 | G 1/8   | 8             | NO       | 66,4   | 63,5   | 18,7   |
| K- 07 15 14 06 | G 1/4   | 6             | NO       | 61,3   | 57,5   | 14,6   |
| K- 07 15 14 07 | G 1/4   | 8             | NO       | 70,8   | 63,5   | 18,7   |
| K- 07 15 14 10 | G 3/8   | 8             | NO       | 72,4   | 63,5   | 18,7   |