


# K-L-MEHRFACHVERT 6 DR AGR OR

Multiple union elbows with outer hex, 6 outlets, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Savybės

<b>Darbinis slėgis</b>	Max. 15 bar, coarse vacuum
<b>Taikymo sritys</b>	Air, vacuum
<b>rekomenduojamos žarnos</b>	PU or PA (nylon)
<b>Medžiagos</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temperatūros diapazonas</b>	-20 °C to +80 °C
<b>Sandarinimo paviršius</b>	Parallel version: O-ring in housing
<b>Medžiaga</b>	Plastic, Nickel plated brass
<b>Prispaudimo žiedas</b>	Plastic

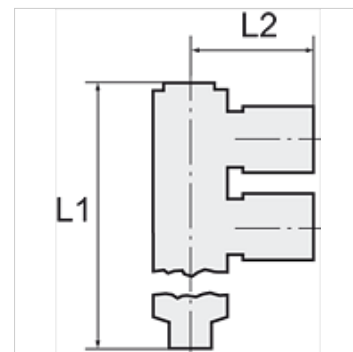

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Prekė

Pavadinimas	Sriegis	žarnos išoriniam Ø	L1 (mm)	L2 (mm)	SW (rakto dydis)
K- 07 40 43 62	G 1/8	6 mm	54,5	24,0	14 mm
K- 07 40 43 63	G 1/8	8 mm	59,0	28,5	14 mm
K- 07 40 43 60	G 1/4	6 mm	56,5	24,0	17 mm
K- 07 40 43 61	G 1/4	8 mm	61,0	28,5	17 mm
K- 07 40 43 59	G 1/4	10 mm	61,0	33,7	19 mm
K- 07 40 43 64	G 3/8	10 mm	74,0	33,7	19 mm
K- 07 40 43 65	G 3/8	12 mm	75,0	37,5	24 mm
K- 07 40 43 58	G 1/2	12 mm	76,5	37,5	24 mm