


K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

HANSA FLEX

Īpašības

Modelis	PNP
Mērīšanas vielas pieslēgums	G 1/8 male and M 5 female
Histerēze	Adjustable: 3 to 25% of set value
Temperatūras diapazons	0 - 50 °C
Darba vides	Non-aggressive gases. dry, oil-free air
Korpuss	Polycarbonate
Izejas signāls	Analogue: 1 to 5 V
Elektriskais pieslēgums	Male connector M8, four pin
Slēgšanas daudzums	125 mA
Strāvas patēriņš	30 mA
Aizdedzes stāvokļa indikators	LED

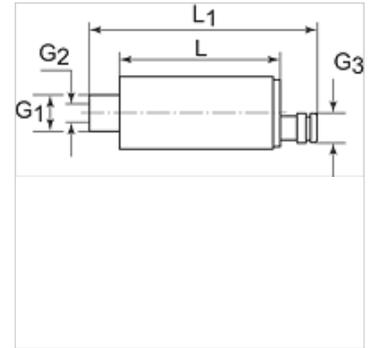

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use.
Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

Izstrādājums

Apzīmējums	G1 ārpusē	G2 iekšpusē	G3 ārpusē	L (mm)	L1 (mm)	Mērīšanas diapazons	Sriegums
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC