


K-DRG TRINKWASSER DVGW

Pressure regulators for drinking water, DVGW approved



Eigenschappen

Ingangsdruk	Max. 25 bar
Middelen	Drinking water, nitrogen, compressed air, non-aggressive liquids
Bedrijfstemperatuur	Max. 40 °C (transparent strainer cup), Max. 70 °C (brass strainer cup)
Afdichtmateriaal	NBR
Veerkap	Plastic
Behuizing	Brass
Zeefkop	Plastic or brass
Overige gegevens	DVGW Certificate (only for K-07250457 - K-07250462)

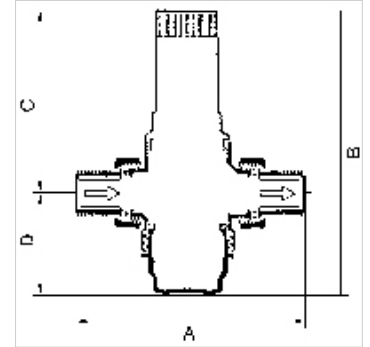

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Diaphragm pressure regulators with pressure-reduced single-seated valve and built-in strainer. These pressure regulators, which are independent of inlet pressure, protect domestic water installations against excessive supply pressure. They can also be used for commercial or industrial purposes providing their specification is adequate.

Artikel

Aanduiding	Schroefdraad	Regelbereik	Debiet kvs-waarde (m ³ /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 57	R 1/2	1.5 - 6 bar	2,4	140,0	147,0 mm	89,0	58,0
K- 07 25 04 58	R 3/4	1.5 - 6 bar	3,1	160,0	147,0 mm	89,0	58,0
K- 07 25 04 59	R 1	1.5 - 6 bar	7,6	180,0	175,0 mm	111,0	64,0
K- 07 25 04 60	R 1 1/4	1.5 - 6 bar	9,1	200,0	175,0 mm	111,0	64,0
K- 07 25 04 61	R 1 1/2	1.5 - 6 bar	12,6	225,0	299,0 mm	173,0	126,0
K- 07 25 04 62	R 2	1.5 - 6 bar	12,0	255,0	299,0 mm	173,0	126,0
K- 07 25 04 63	R 1/2	1.5 - 12 bar	2,4	140,0	152,0 mm	96,0	56,0
K- 07 25 04 64	R 3/4	1.5 - 12 bar	3,1	160,0	152,0 mm	96,0	56,0
K- 07 25 04 65	R 1	1.5 - 12 bar	7,6	180,0	217,0 mm	140,0	77,0
K- 07 25 04 66	R 1 1/4	1.5 - 12 bar	9,1	200,0	217,0 mm	140,0	77,0
K- 07 25 04 67	R 1 1/2	1.5 - 12 bar	12,6	225,0	285,0 mm	172,0	113,0
K- 07 25 04 68	R 2	1.5 - 12 bar	12,0	255,0	285,0 mm	172,0	113,0
K- 07 25 04 69	R 1/2	0.5 - 2 bar	2,4	140,0	204,0 mm	148,0	56,0
K- 07 25 04 70	R 3/4	0.5 - 2 bar	3,1	160,0	204,0 mm	148,0	56,0
K- 07 25 04 71	R 1	0.5 - 2 bar	7,6	180,0	262,0 mm	185,0	77,0

Reserveonderdelen

K-VENTILAUUSTAUSCHSATZ	Valve replacement kit
K-ERSATZSIEBE	Replacement strainer
K-DOPPELRINGSCHLUESSEL	Double ring spanner
K-VERSCHLEI-SATZ DRCKREGLER	Wearing part set consisting of: 2x cap nuts, 2x screw fittings, 2x sealing rings