


# K-DRG TRINKWASSER DVGW

Pressure regulators for drinking water, DVGW approved

**HANSA FLEX**

## Właściwości

<b>Ciśnienie wejściowe</b>	Max. 25 bar
<b>Czynniki robocze</b>	Drinking water, nitrogen, compressed air, non-aggressive liquids
<b>Temperatura robocza</b>	Max. 40 °C (transparent strainer cup), Max. 70 °C (brass strainer cup)
<b>Materiał uszczelniający</b>	NBR
<b>kołpak sprężynujący</b>	Plastic
<b>Obudowa</b>	Brass
<b>zbiornik sitowy</b>	Plastic or brass
<b>Dalsze informacje</b>	DVGW Certificate (only for K-07250457 - K-07250462)

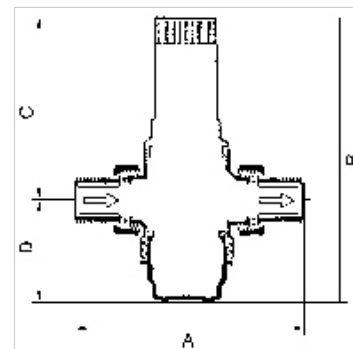

## Wskazówka

Dalsze informacje na zapytanie.

## Opis

Diaphragm pressure regulators with pressure-reduced single-seated valve and built-in strainer. These pressure regulators, which are independent of inlet pressure, protect domestic water installations against excessive supply pressure. They can also be used for commercial or industrial purposes providing their specification is adequate.

## Artykuł

Oznaczenie	Gwint	Zakres regulacji	Przepływ wartość kvs (m <sup>3</sup> /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 57	R 1/2	1.5 - 6 bar	2,4	140,0	147,0 mm	89,0	58,0
K- 07 25 04 58	R 3/4	1.5 - 6 bar	3,1	160,0	147,0 mm	89,0	58,0
K- 07 25 04 59	R 1	1.5 - 6 bar	7,6	180,0	175,0 mm	111,0	64,0
K- 07 25 04 60	R 1 1/4	1.5 - 6 bar	9,1	200,0	175,0 mm	111,0	64,0
K- 07 25 04 61	R 1 1/2	1.5 - 6 bar	12,6	225,0	299,0 mm	173,0	126,0
K- 07 25 04 62	R 2	1.5 - 6 bar	12,0	255,0	299,0 mm	173,0	126,0
K- 07 25 04 63	R 1/2	1.5 - 12 bar	2,4	140,0	152,0 mm	96,0	56,0
K- 07 25 04 64	R 3/4	1.5 - 12 bar	3,1	160,0	152,0 mm	96,0	56,0
K- 07 25 04 65	R 1	1.5 - 12 bar	7,6	180,0	217,0 mm	140,0	77,0
K- 07 25 04 66	R 1 1/4	1.5 - 12 bar	9,1	200,0	217,0 mm	140,0	77,0
K- 07 25 04 67	R 1 1/2	1.5 - 12 bar	12,6	225,0	285,0 mm	172,0	113,0
K- 07 25 04 68	R 2	1.5 - 12 bar	12,0	255,0	285,0 mm	172,0	113,0
K- 07 25 04 69	R 1/2	0.5 - 2 bar	2,4	140,0	204,0 mm	148,0	56,0
K- 07 25 04 70	R 3/4	0.5 - 2 bar	3,1	160,0	204,0 mm	148,0	56,0
K- 07 25 04 71	R 1	0.5 - 2 bar	7,6	180,0	262,0 mm	185,0	77,0

## Części zamienne

K-VENTILAUSTAUSSCHSATZ	Valve replacement kit
K-ERSATZSIEBE	Replacement strainer
K-DOPPELRINGSCHLUESSEL	Double ring spanner
K-VERSCHLEI-SATZ DRCKREGLER	Wearing part set consisting of: 2x cap nuts, 2x screw fittings, 2x sealing rings