



HK CTPM

Êmbolo roscado para cilindro hidráulico

HANSA FLEX

Características

Material Aço C40

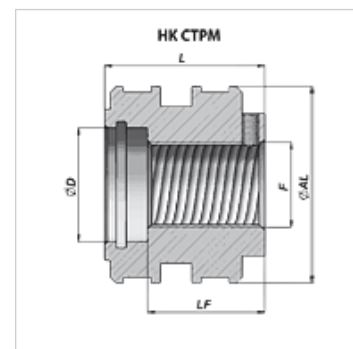

Artigo

| Descrição | Ø AL (mm) | Ø D (mm) | F | L (mm) | LF (mm) | Peso (kg) | Conjunto de vedação adequado |
|---------------------|--------------|-------------|----------|-----------|------------|--------------|------------------------------|
| HK CTPM 050 021 040 | 50 | 21,0 | M 20x1,5 | 40 | 28 | 0,4 | HK GKG CTPM 050 |
| HK CTPM 050 025 040 | 50 | 25,0 | M 22x1,5 | 40 | 28 | 0,4 | On request |
| HK CTPM 060 030 045 | 60 | 30,0 | M 27x2 | 45 | 30 | 0,6 | HK GKG CTPM 060 |
| HK CTPM 063 030 045 | 63 | 30,0 | M 27x2 | 45 | 30 | 0,7 | On request |
| HK CTPM 070 035 056 | 70 | 35,0 | M 33x2 | 56 | 41 | 1,0 | On request |
| HK CTPM 070 040 056 | 70 | 40,0 | M 30x2 | 56 | 41 | 1,0 | HK GKG CTPM 070 |
| HK CTPM 080 040 056 | 80 | 40,0 | M 30x2 | 56 | 41 | 1,4 | HK GKG CTPM 080 |
| HK CTPM 080 041 056 | 80 | 40,0 | M 33x2 | 56 | 41 | 1,4 | On request |
| HK CTPM 090 038 055 | 90 | 38,0 | M 36x3 | 55 | 40 | 1,8 | HK GKG CTPM 090 |
| HK CTPM 090 043 055 | 90 | 43,0 | M 40x2 | 55 | 47 | 1,7 | HK GKG CTPM 090 |
| HK CTPM 100 045 056 | 100 | 45,0 | M 42x2 | 56 | 41 | 2,2 | HK GKG CTPM 100 |
| HK CTPM 110 050 070 | 110 | 50,0 | M 48x3 | 70 | 55 | 3,4 | HK GKG CTPM 110 |
| HK CTPM 120 050 070 | 120 | 50,0 | M 48x3 | 70 | 55 | 4,1 | HK GKG CTPM 120 |
| HK CTPM 120 054 070 | 120 | 54,0 | M 52x2 | 70 | 55 | 3,9 | On request |
| HK CTPM 125 050 070 | 125 | 51,0 | M 48x3 | 70 | 55 | 4,4 | HK GKG CTPM 125 |
| HK CTPM 125 054 070 | 125 | 54,0 | M 52x2 | 70 | 57 | 4,2 | HK GKG CTPM 125 |
| HK CTPM 140 050 075 | 140 | 50,0 | M 48x3 | 75 | 57 | 6,0 | HK GKG CTPM 140 |
| HK CTPM 140 067 075 | 140 | 67,0 | M 64x3 | 75 | 61 | 5,6 | On request |
| HK CTPM 150 056 080 | 150 | 56,0 | M 52x3 | 80 | 60 | 7,5 | HK GKG CTPM 150 |
| HK CTPM 150 067 080 | 150 | 67,0 | M 64x3 | 80 | 64 | 6,9 | On request |
| HK CTPM 160 056 080 | 160 | 56,0 | M 52x3 | 80 | 60 | 8,5 | HK GKG CTPM 160 |
| HK CTPM 160 076 080 | 160 | 76,0 | M 74x3 | 80 | 64 | 7,8 | On request |
| HK CTPM 180 090 115 | 180 | 90,0 | M 80x2 | 115 | 85 | 14,1 | HK GKG CTPM 180 |
| HK CTPM 200 100 115 | 200 | 100,0 | M 90x2 | 115 | 85 | 17,5 | HK GKG CTPM 200 |
| HK CTPM 220 110 120 | 220 | 110,0 | M 100x2 | 120 | 90 | 21,8 | HK GKG CTPM 220 |
| HK CTPM 250 125 130 | 250 | 125,0 | M 115x3 | 130 | 100 | 30,1 | HK GKG CTPM 250 |
| HK CTPM 300 150 140 | 300 | 150,0 | M 140x3 | 140 | 105 | 44,9 | HK GKG CTPM 300 |