

# K-WTST SAFETY BK SCHA AN DR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator

## Características

| | |
|---|---|
| **Pressão de entrada** | 2.5 - 16 bar |
| **Pressão de saída** | 0.5 - 8 bar |
| **Faixa de temperatura** | -10 °C to +50 °C |
| **Fluidos** | Ar comprimido |
| **Material de vedação** | NBR |
| **Rosca de conexão** | Material: Die-cast zinc |
| **Reservatório** | Polycarbonate (with bayonet lock) and bowl guard |
| **Elemento filtrante** | Cellpor (PE) 5 µm |
| **Carcaça** | Material: Grivory® (PA 66) |
| **Membrana** | NBR |
| **Consumo de ar próprio** | Max. 1.5 l/min (depending on secondary pressure) |
| **Medição do valor de fluxo** | At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar |
| **Conexão Purga Válvula de esferas** | Silencer |



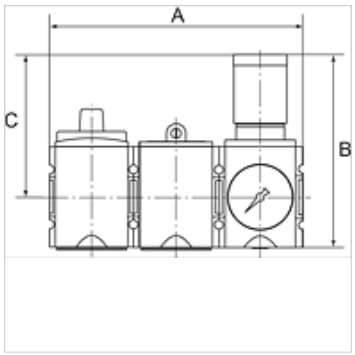


## Nota

Outras indicações a pedido.

## Descrição

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Instruções de encomenda

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Artigo

| Descrição | Rosca | Faixa de regulagem | Fluxo (L/min) | A (mm) | B | C (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 15 20** | G 1/4 | 2.5 - 8 bar | 2000 | 156,0 | 128,5 mm | 95,5 |
| **K- 07 25 15 21** | G 3/8 | 2.5 - 8 bar | 2000 | 156,0 | 128,5 mm | 95,5 |
| **K- 07 25 15 22** | G 3/8 | 2.5 - 8 bar | 4300 | 189,0 | 149,5 mm | 110,0 |
| **K- 07 25 15 23** | G 1/2 | 2.5 - 8 bar | 4300 | 189,0 | 149,5 mm | 110,0 |
| **K- 07 25 15 24** | G 3/4 | 2.5 - 8 bar | 10000 | 255,0 | 191,0 mm | 137,0 |
| **K- 07 25 15 25** | G 1 | 2.5 - 8 bar | 10000 | 255,0 | 191,0 mm | 137,0 |

## Acessórios

| | |
|---|---|
| **K-STECKSCHLOSS** | Key lock |
| **K-VORHAENGESCHLOSS** | Padlock |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*