


### Caracteristici

|                 |                         |
|-----------------|-------------------------|
| Racord 1        | Filet metric de piuliță |
| Tip constructiv | Piuliță olandeză        |
| Standard        | DIN 3870                |
| Material        | Alamă                   |

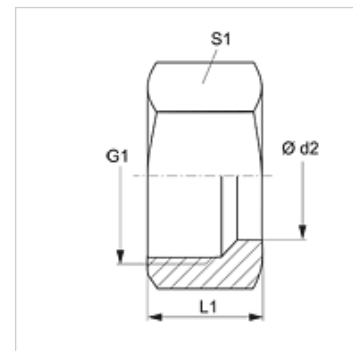

### Articol

| Denumire       | Seria | Ø d2<br>(mm) | G1         | L1<br>(mm) | S1 |
|----------------|-------|--------------|------------|------------|----|
| UEM 04 LL MG   | LL    | 4            | M 8 x 1    | 11,0       | 10 |
| UEM 05 LL MG   | LL    | 5            | M 10 x 1   | 11,5       | 12 |
| UEM 06 LL MG   | LL    | 6            | M 10 x 1   | 11,5       | 12 |
| UEM 08 LL MG   | LL    | 8            | M 12 x 1   | 12,0       | 14 |
| UEM 10 LL MG   | LL    | 10           | M 14 x 1   | 12,5       | 17 |
| UEM 12 LL MG   | LL    | 12           | M 16 x 1   | 13,0       | 19 |
| UEM NW 04 L MG | L     | 6            | M 12 x 1,5 | 14,5       | 14 |
| UEM NW 06 L MG | L     | 8            | M 14 x 1,5 | 14,5       | 17 |
| UEM NW 08 L MG | L     | 10           | M 16 x 1,5 | 15,5       | 19 |
| UEM NW 10 L MG | L     | 12           | M 18 x 1,5 | 15,5       | 22 |
| UEM NW 13 L MG | L     | 15           | M 22 x 1,5 | 17,0       | 27 |
| UEM NW 16 L MG | L     | 18           | M 26 x 1,5 | 18,0       | 32 |
| UEM NW 20 L MG | L     | 22           | M 30 x 2   | 20,0       | 36 |
| UEM NW 25 L MG | L     | 28           | M 36 x 2   | 21,0       | 41 |
| UEM NW 32 L MG | L     | 35           | M 45 x 2   | 24,0       | 50 |
| UEM NW 40 L MG | L     | 42           | M 52 x 2   | 24,0       | 60 |
| UEM NW 03 S MG | S     | 6            | M 14 x 1,5 | 16,5       | 17 |
| UEM NW 04 S MG | S     | 8            | M 16 x 1,5 | 16,5       | 19 |
| UEM NW 06 S MG | S     | 10           | M 18 x 1,5 | 17,5       | 22 |
| UEM NW 08 S MG | S     | 12           | M 20 x 1,5 | 17,5       | 24 |
| UEM NW 10 S MG | S     | 14           | M 22 x 1,5 | 20,5       | 27 |
| UEM NW 13 S MG | S     | 16           | M 24 x 1,5 | 20,5       | 30 |
| UEM NW 16 S MG | S     | 20           | M 30 x 2   | 24,0       | 36 |
| UEM NW 20 S MG | S     | 25           | M 36 x 2   | 27,0       | 46 |
| UEM NW 25 S MG | S     | 30           | M 42 x 2   | 29,0       | 50 |
| UEM NW 32 S MG | S     | 38           | M 52 x 2   | 32,5       | 60 |

Seria: LL = foarte ușoară L = ușoară S = grea - PN = Presiunea nominală PB = Presiunea max. de lucru - Ø d2 = diametru exterior țevă

### Variante produs

|        |                                      |
|--------|--------------------------------------|
| UEM    | Piuliță olandeză, Oțel               |
| UEM VA | Piuliță olandeză VA, oțel inoxidabil |