
K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

Caracteristici

Utilizare	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
Medii	dry, oil-free air and non-aggressive gases
Domeniu de temperaturi	0 - 50 °C
Semnal de ieşire	1 to 5 analogous to V
Histereză	Fixed: 20 mbar (model with digital sensor)
Lungime cablu	3 m
Tip de protecţie	IP 40



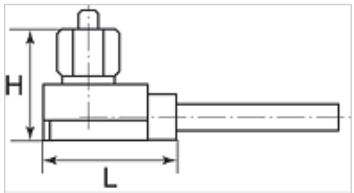

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Articol

Denumire	Racord	H (mm)	L (mm)	Domeniu de măsurare	Tensiune
K- 07 45 01 57	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.