
K-KOMPAKTEJEKTOREN CP

Compact ejectors »CP«, digital vacuum switch with air-saving function

Свойства

Свойства	Vacuum generator with integrated control valves and system monitoring functions Gripping and blowing off can be controlled without the need for external valves Optimised air consumption thanks to many models with differing suction capacities Minimum energy costs in continuous operation thanks to automatic air-saving Easy adjustment with foil keypad and LED display of the settings
Применение	Handling of air-tight or slightly porous workpieces in fully automated handling systems e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries
Основные части	Anodised aluminium
Встроенный	NC blow-off valve, filter, silencer, non-return valve



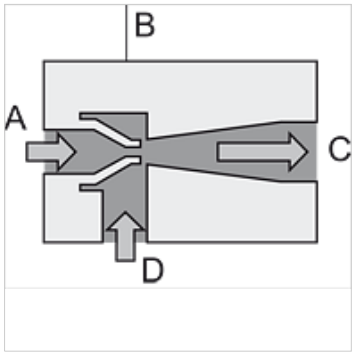

Указание

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.
Прочие данные только по запросу.

Описание

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Дополнительная информация

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving.

Изделие

Наименование	Размер форсунки	Состояние покоя всасывающего клапана	Подключение системы сжатого воздуха	Вакуумное соединение	Расход воздуха при всасывании (L/min)	макс. скорость откачки (L/min)	Размер	Рабочее давление (bar)
K- 07 45 01 33	1,5	NC	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 34	1,5	NO	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 37	2,0	NC	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 38	2,0	NO	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 41	2,5	NC	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0
K- 07 45 01 42	2,5	NO	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0

Принадлежности

K-ANSCH KABEL VAKUUMSCHAL	Connection cable for vacuum switch
K-ERSATZSCHALLDAEMPFER 2	Replacement silencers
K-ERSATZFILTERELEMENTE	Replacement filter element

Несмотря на тщательную проверку мы не может исключить ошибки, поэтому мы не берем на себя ответственность за содержащуюся информацию.