


PN AF 45

Pritisna nazuvica, DKF W45°

HANSA FLEX

Osobine

Oblast primene	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
Priključak 1	metrički navoj navrtke
Oblik zaptivke 1	24° spoljašnji konus za colovanu cev francuske serije modela.
Skraćenica	DKF
Seriya	French (imperial pipe - series gas)
Materijal	čelik
Površinska zaštita	galvanska prevlaka

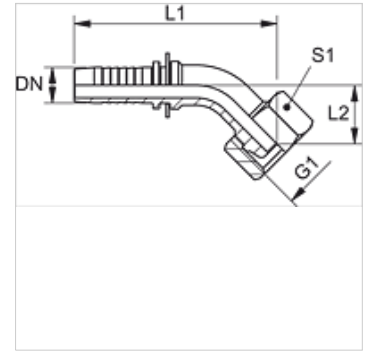

Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

Artikal

Naziv	DN	Veličina	col	Radni pritisak (bar)	G1	Ø mm za cev spolja	L1 (mm)	L2 (mm)	S1
PN 08 AF 10 45	8	5	5/16"	400,0	M 20 x 1,5	13,25	92,0	25,0	24
PN 10 AF 45	10	6	3/8"	400,0	M 20 x 1,5	13,25	91,0	25,0	24
PN 10 AF 13 45	10	6	3/8"	250,0	M 24 x 1,5	16,75	100,0	28,0	30
PN 13 AF 45	12	8	1/2"	250,0	M 24 x 1,5	16,75	98,0	28,0	30
PN 13 AF 16 45	12	8	1/2"	250,0	M 30 x 1,5	21,26	89,0	21,0	36
PN 16 AF 45	16	10	5/8"	250,0	M 30 x 1,5	21,26	94,0	21,0	36
PN 20 AF 45	19	12	3/4"	250,0	M 36 x 1,5	26,75	123,0	33,0	41
PN 25 AF 45	25	16	1"	160,0	M 45 x 1,5	33,50	150,0	41,0	55